# Product datasheet

Pendant lamp, Filo Ball, black, 220-240V AC/50-60Hz, 1x max. 40,00 W

### **Technical Data**

General Characteristics	
Material	metal
Colour	black
Optics	
included in delivery	



#### **Electrical Characteristics**

Power	1x max. 40,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	G9
Number of bases	1
Power supply unit	
Electronically reversible	dimmable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I





# Product datasheet

Pendant lamp, Filo Ball, black, 220-240V AC/50-60Hz, 1x max. 40,00 W

## **Light Direction**


Rotating and tilting range	fixed
Angle of inclination	0°
Radiation direction	
Reflector / lense	symmetrisch

## **Dimensions & Weight**

Length	
Width	
Height	160 mm
Diameter	160 mm
Suspensions from ceiling	1,20 m
Product Weight	699 g

#### **Base dimensions**

Length	
Width	
Height	25 mm
Diameter	100 mm

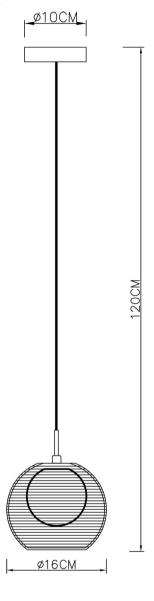

## Product datasheet

Pendant lamp, Filo Ball, black, 220-240V AC/50-60Hz, 1x max. 40,00 W

#### **Absolute maximum ratings**

Working temperature	-5°C - +40°C
Storage temperature	
IP - Code	IP 20

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP 20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I
in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts
are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts
cannot be active.