

Product datasheet

Built in ground lamp, Phakt square Set, black, 220-240V AC/50-60Hz, 1x max. 9,00 W



Technical Data

General Characteristics

Material	plastic
Colour	black
Optics	
included in delivery	installation housing, cover square 1x hex wrench 4x hex bolt


Electrical Characteristics

Power	1x max. 9,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of bases	1
Power supply unit	
Connection possibility	clamp
Protection class I, II, III	II



Product datasheet

Built in ground lamp, Phakt square Set, black, 220-240V AC/50-60Hz, 1x max. 9,00 W

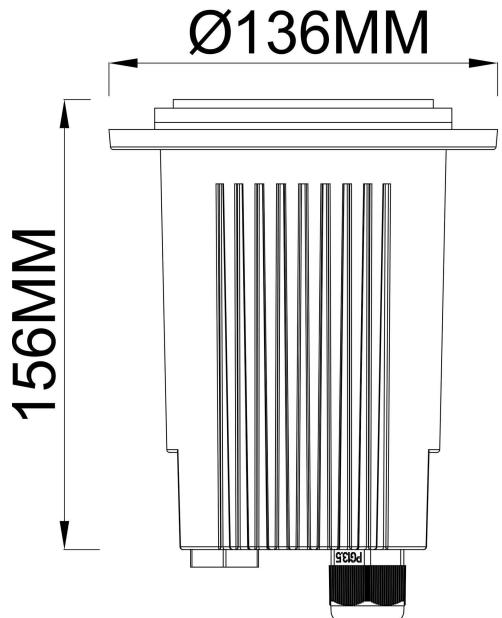

Light Direction

Rotating and tilting range	
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	0,00
Width	0,00
Height	156,00
Diameter	136,00
Mounting Depth	0,00
Product Weight	g

Cut-out dimensions

Length	0,00
Width	0,00
Diameter	0,00

Mounting Bowl

Material	plastic
Length	0,00
Width	0,00
Height	192,00
Diameter	143,00

Product datasheet

Built in ground lamp, Phakt square Set, black, 220-240V AC/50-60Hz, 1x max. 9,00 W

Absolute maximum ratings

Working temperature	
Storage temperature	-10°C - +50°C
foreseen application	walkable - 5 kN
IP - Code	IP67



Maximum surface temperature 65°C

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP67	Protection against penetration of dust. (complete dust protection) Protection against temporary immersion.
<input checked="" type="checkbox"/>	Lightings of Protection Class II in which the protection against electric shock is not based solely on the insulation, but additional safety precautions such as additional or reinforced insulation are provided. There are no provisions for the connection of an equipment grounding conductor exists, yet underlying the protection of the facility conditions.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.