

Product datasheet

Built in ceiling lamp, Ceti 5 Adjust, matt white, 14-15V DC, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	matt white
Optics	
included in delivery	



Electrical Characteristics

Power	10,50 W
input voltage	14-15V DC
input current	700 mA
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimmable via optional power supply
Connection possibility	wire with open ends
Protection class I, II, III	III




Product datasheet

Built in ceiling lamp, Ceti 5 Adjust, matt white, 14-15V DC, warmwhite

Light Direction

Rotating and tilting range	swivel
Angle of inclination	90°
Radiation direction	
Reflector / lense	symmetrisch



77

155

83

Dimensions & Weight

Length	155,00
Width	77,00
Height	83,00
Diameter	0,00
Mounting Depth	80,00
Product Weight	520 g

Cut-out dimensions

Length	143,00
Width	76,00
Diameter	0,00

Product datasheet

Built in ceiling lamp, Ceti 5 Adjust, matt white, 14-15V DC, warmwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +40°C
IP - Code	IP20

EEI	This product contains a light source of energy efficiency class G
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.

Dear customer,

thank you for deciding to purchase our product. The product fulfils the requirements of effective European and national guidelines.

To maintain the condition of the product and to ensure safe operation, you - as the user - must observe the product notes and the operation manual! They contain important information for the start-up and handling. It is important, therefore, that these documents are archived carefully for referring to information at a later stage.

1. Safety Instructions

We are not responsible for any property damage or personal injury caused by failure to observe these product notes and manual, improper handling or unauthorised modifications.

It can only be installed by a qualified electrician.

Make sure that the item has not been damaged during transport before putting the light into operation. It may not be operated if there are any damages to electrical parts.

It may only be operated once removed from the packaging.

The type plate must not be removed.

The connection lines in the building must be disconnected before installation and secured against being switched back on. For this, trip the corresponding fuse switch in the building installation.

Make sure the electrical specifications for the connection lines correspond with the specifications given on the nameplate of this product.

Please take care during installing for the correct polarity (V+, V-) and do also use the right power supplies with the following safety measures: SELV = Safety Extra Low Voltage, overload protection and short-circuit protection.

Make sure that the cables and plugs are not subject to tension or torsional forces and do not bend the cables. Protect all cables and insulation against possible damages.

Output lines should be laid separately and spaced apart from other lines. The power supply cables and the lamp feeders must not cross each other.

The cable lengths may be max. 2 m between power supply and lamp. In addition, the radio interference suppression is not guaranteed and it comes through strong inductive coupling with the power line brownouts.

Do not allow the product to come into contact with extreme heat or naked flames.

Use the supplied fastening material only when it is suited for the installation background.

The product must not be covered with objects (decorations) or thermally insulating coverings /similar materials.

Before disposal of the packaging material make sure that all components are removed.

Keep packaging material away from the reach of children and pets. The packaging contains small parts that may be swallowed by children.

2. Proper Use

This product is only intended for lighting purposes and may only be operated on normal or non-flammable surfaces.

Use the product only in protected and dry interior rooms.

Make sure that the surface is suitable for permanently and reliably taking the weight of the light.

3. Care

Repairs may only be carried out by a qualified electrician.

Disconnect the entire product from the mains first and allow it to cool down before cleaning or maintaining.

Use a dry or slightly moistened cloth for cleaning.

Never use any chemicals, flammable cleaning agents or abrasives. These may cause damage to the surface coating and/or the insulators.

4. Faulty Function

Light switched on at the switch?

Transformer mounted and connected properly?

If available; remote control intact? Check the batteries.

Check the connected lines.

Lamp defective?

5. Changing Lamps

The light source of this lamp is not replaceable. When the light source has reached its end of life, replace the entire luminaire.

6. Storage and Disposal


Used electronic devices must be brought back to public collection points and must not be disposed of as household waste.

Storage in a dry and clean environment. Do not strain the product mechanically during storage.

Montageanleitung / Mounting instruction

Deckeneinbauleuchte, Ceti 5 adjust / Built in ceiling lamp, Ceti 5 adjust
700 mA, 10,00 W

Achtung! Für diese Arbeiten müssen Sie die Spannungsversorgung trennen.
Attention! For this work you must turn off the power supply.

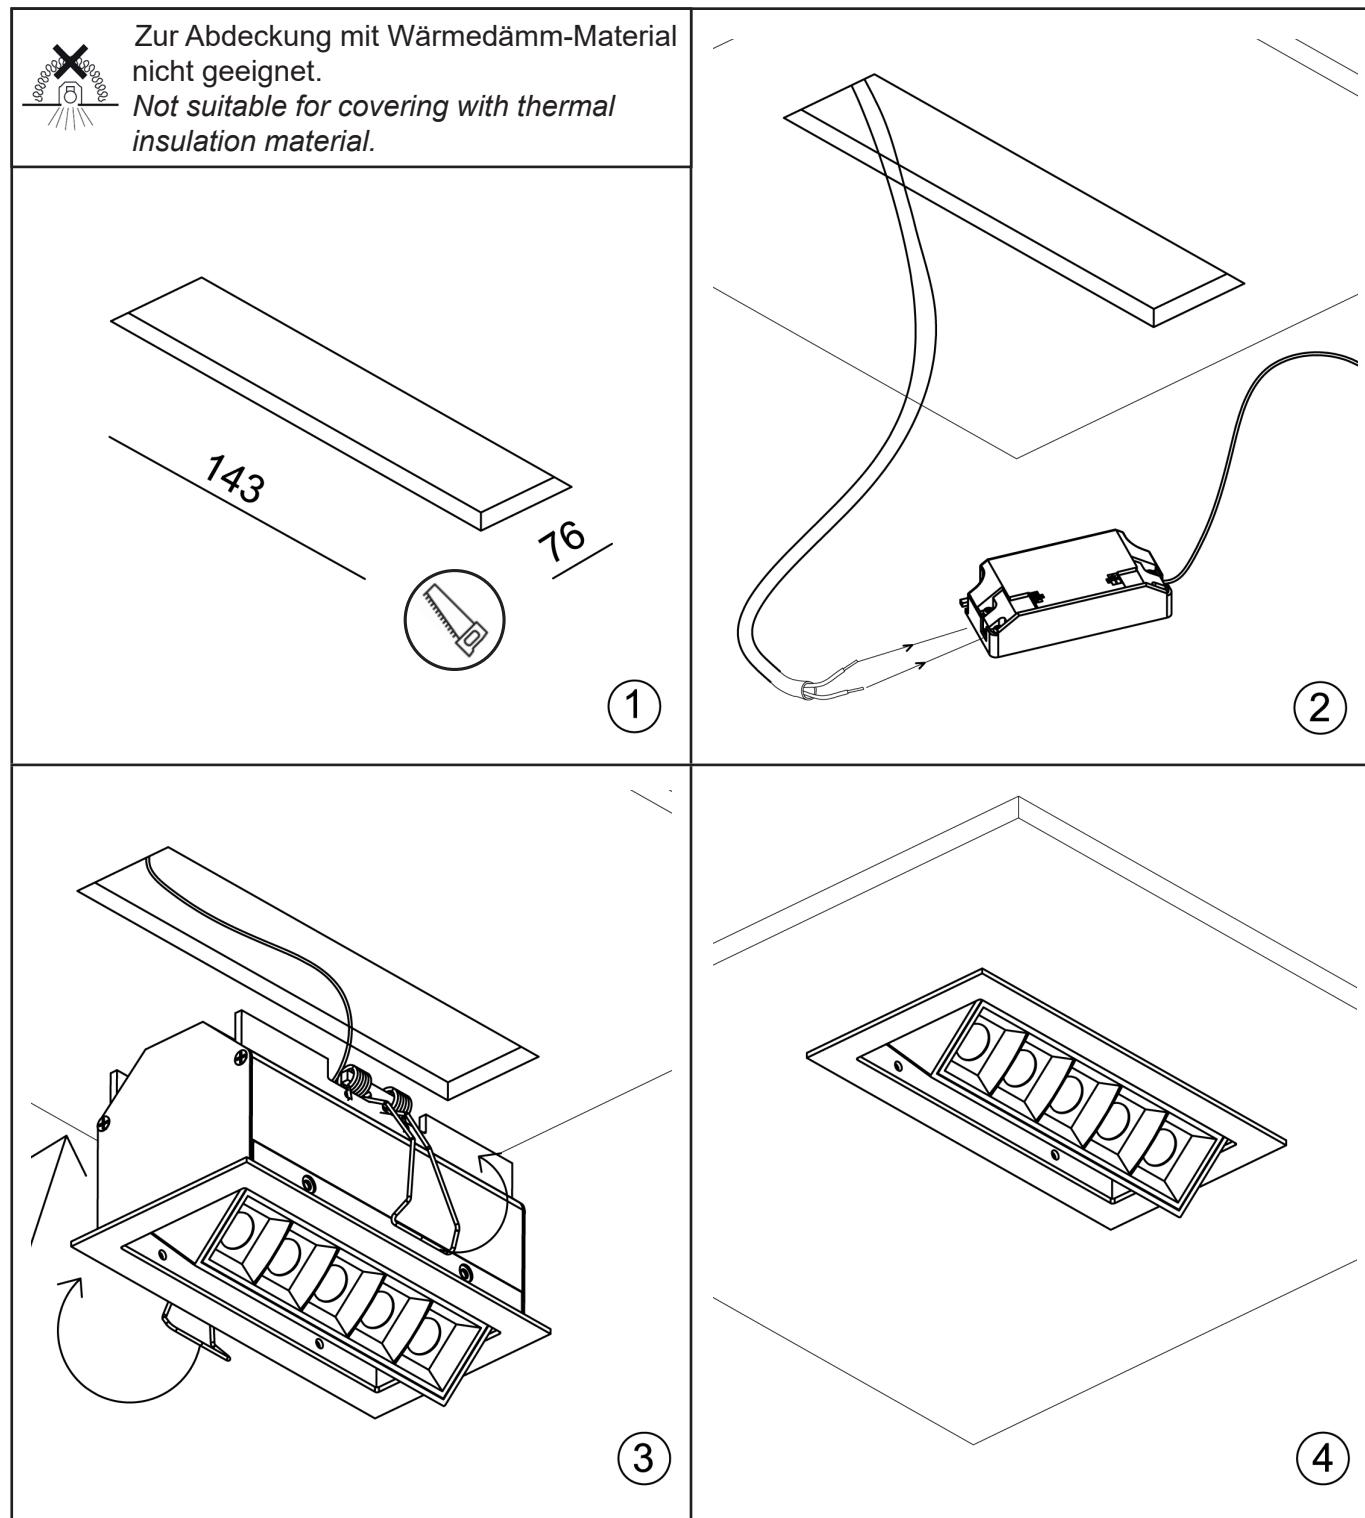


Spectrum Test Report

Client name:		Report time:	2018-09-20
Item No:		Model name:	

Results

Spectrum

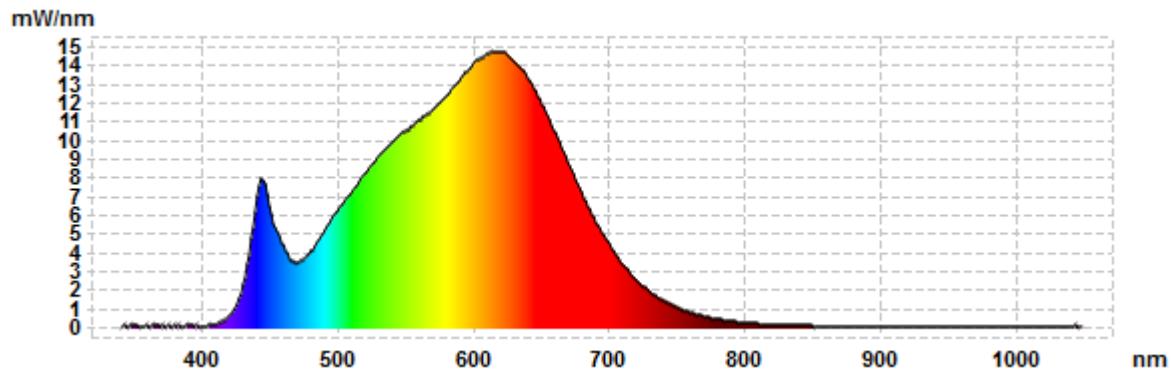

CIE 1931 2° observer		CIE 1964 10° observer		Color Parameters	
x	0.4277	x	0.4333	CCT [k]	3164
y	0.4044	y	0.4012	Chromaticity Error	0.002
u'	0.2445	u'	0.2495	Color Peak	622.06
v'	0.5202	v'	0.5197	Color Peak Value	14.76
				Color Dominant	581.6
Rendering Indices		Ra	91.2	Radiometric	2.6432
R1	91.0	R8	81.3		
R2	93.9	R9	54.6	Electrical Parameters	
R3	95.6	R10	84.8	Luminous [lm]	778.76
R4	92.1	R11	92.2	Luminous Efficacy [lm/W]	77.3688
R5	90.5	R12	81.1	Power [W]	10,0656
R6	92.2	R13	91.5	Current [A]	0.699
R7	92.9	R14	96.9	Voltage [V]	14.4