

Product datasheet

Surface mounted wall lamp, Oval II, silver, 220-240V AC/50-60Hz, 7,00 W, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	silver
Optics	brushed
included in delivery	



Electrical Characteristics

Power / power consumption	7,00 W / 7,70 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	630 lm
Beam angle	
LED type	High Power
LED quantity	7
Spectral power distribution	



Product datasheet

Surface mounted wall lamp, Oval II, silver, 220-240V AC/50-60Hz, 7,00 W, warmwhite

Light Direction


Rotating and tilting range	fixed
Angle of inclination	0°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	250 mm
Width	135 mm
Height	103 mm
Diameter	
Suspensions from ceiling	
Product Weight	553 g

Base dimensions

Length	80 mm
Width	45 mm
Height	57 mm
Diameter	

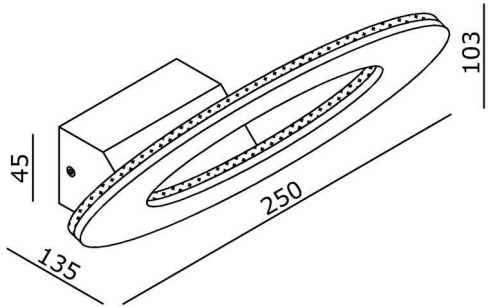

Product datasheet

Surface mounted wall lamp, Oval II, silver, 220-240V AC/50-60Hz, 7,00 W, warmwhite

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 54




General product data

Environmental Characteristics

Energy label	A+
Energy consumption	8 kWh/1000h

Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

IP 54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person