

Product datasheet

Built in ceiling lamp, Altair round, Signal white RAL 9003, 12V AC/DC, 1x max. 50,00 W

Technical Data

General Characteristics

Material	aluminum die casting
Colour	Signal white RAL 9003
Optics	
included in delivery	inkl. GU5.3 / MR16 lampholder



Electrical Characteristics

Power	1x max. 50,00 W
input voltage	12V AC/DC
input current	
Base (standard designation)	GU5.3 / MR16
Number of bases	1
Power supply unit	excl. transformer
Electronically reversible	dimmable via optional bulb
Connection possibility	wire with open ends
Protection class I, II, III	III



Product datasheet

Built in ceiling lamp, Altair round, Signal white RAL 9003, 12V AC/DC, 1x max. 50,00 W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	0,00
Width	0,00
Height	35,00
Diameter	85,00
Mounting Depth	0,00
Product Weight	

Cut-out dimensions

Length	0,00
Width	0,00
Diameter	68,00

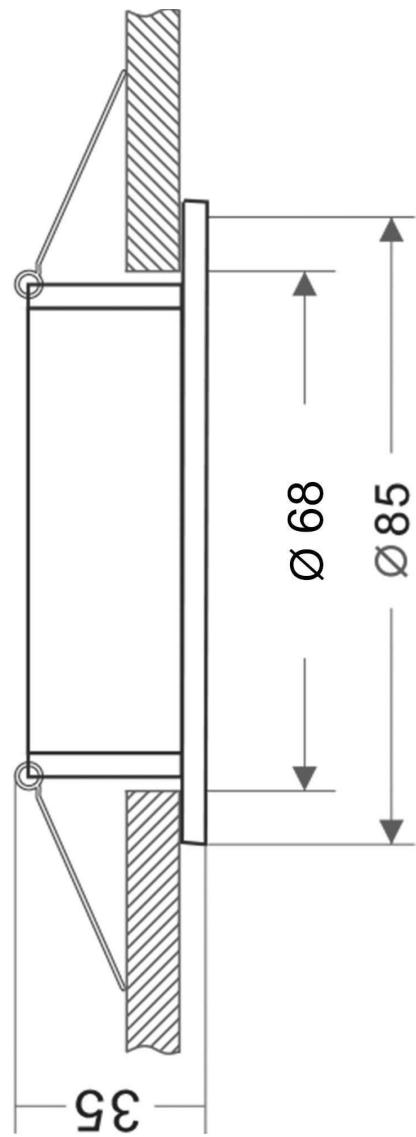

Product datasheet

Built in ceiling lamp, Altair round, Signal white RAL 9003, 12V AC/DC, 1x max. 50,00 W

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +40°C
IP - Code	IP65

EEI

The luminaire is suitable for lamps of energy efficiency classes A++ to E.

IP65

Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.



Lightings of Protection Class III

Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
