

Product datasheet

Surface mounted ceiling lamp, Indi I, silver, 220-240V AC/50-60Hz, 1x max. 50,00 W

Technical Data

General Characteristics

Material	aluminum / aluminum
Colour	silver / silver
Optics	brushed / chrome
included in delivery	2x screws with dowels, 1x vacuum lifting pad



Electrical Characteristics

Power	1x max. 50,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GU10
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I

Product datasheet

Surface mounted ceiling lamp, Indi I, silver, 220-240V AC/50-60Hz, 1x max. 50,00 W

Light Direction


Rotating and tilting range	rotatable-swivel
Angle of inclination	90°
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	0,00
Width	0,00
Height	124,00
Diameter	100,00
Suspensions from ceiling	0,00
Product Weight	222 g

Base dimensions

Length	0,00
Width	0,00
Height	25,00
Diameter	80,00

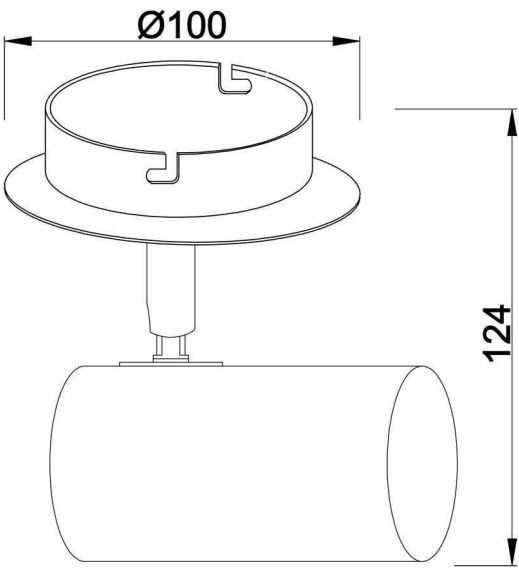


Product datasheet

Surface mounted ceiling lamp, Indi I, silver, 220-240V AC/50-60Hz, 1x max. 50,00 W

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +40°C
IP - Code	IP20

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.