

Product datasheet

Surface mounted wall lamp, Zilly II Up and Down, silver, 220-240V AC/50-60Hz, 2x max. 35,00 W

Technical Data

General Characteristics

Material	stainless steel / glass
Colour	silver
Optics	/ clear / transparent
included in delivery	



Electrical Characteristics

Power	2x max. 35,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GU10
Number of bases	2
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I

Product datasheet

Surface mounted wall lamp, Zilly II Up and Down, silver, 220-240V AC/50-60Hz, 2x max. 35,00 W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	symmetrisch

Dimensions & Weight

Length	178,00
Width	60,00
Height	105,00
Diameter	60,00
Suspensions from ceiling	0,00
Product Weight	951 g

Base dimensions

Length	102,00
Width	42,00
Height	22,00
Diameter	0,00

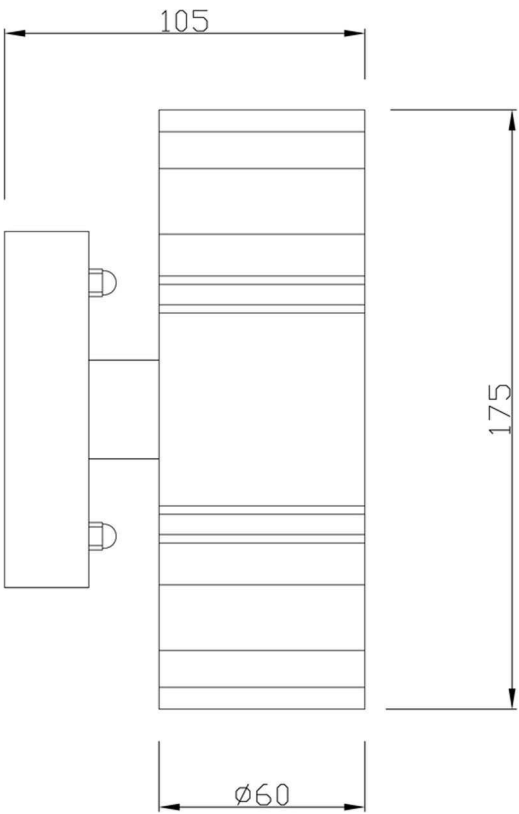


Product datasheet

Surface mounted wall lamp, Zilly II Up and Down, silver, 220-240V AC/50-60Hz, 2x max. 35,00 W

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP44

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.