

# Product datasheet

Floor lamp, Antliae 15, Traffic grey B RAL 7043, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	Traffic grey B RAL 7043
Optics	
included in delivery	3x screws 3x dowels



### Electrical Characteristics

Power / power consumption	12,00 W / 13,00 W
Input Voltage	100-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Connection box
Protection class I, II, III	I

### Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	380 lm
Beam angle	
LED type	COB
LED quantity	1
Spectral power distribution	583 nm



# Product datasheet

Floor lamp, Antliae 15, Traffic grey B RAL 7043, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	


## Dimensions & Weight

Length	152,00
Width	121,00
Height	150,00
Diameter	0,00
Product Weight	880 g

## Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65

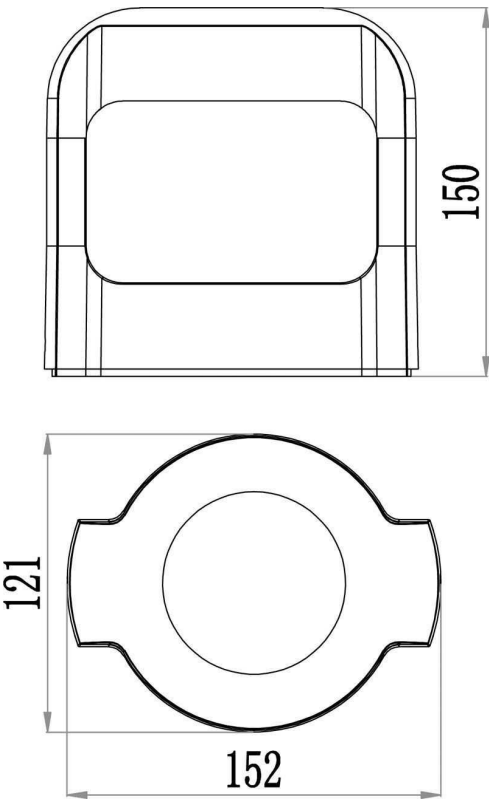

# Product datasheet

Floor lamp, Antliae 15, Traffic grey B RAL 7043, 100-240V AC/50-60Hz, 12,00 W, warmwhite




## General product data

### Environmental Characteristics

Energy label	
Energy consumption	13 kWh/1000h

### Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,80
Number of switching cycles	15000

IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

# Product datasheet

Floor lamp, Antliae 50, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	3x screws 3x dowels



### Electrical Characteristics

Power / power consumption	12,00 W / 13,00 W
Input Voltage	100-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Connection box
Protection class I, II, III	I

### Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	650 lm
Beam angle	
LED type	COB
LED quantity	1
Spectral power distribution	582 nm



# Product datasheet

Floor lamp, Antliae 50, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

## Dimensions & Weight

Length	152 mm
Width	121 mm
Height	500 mm
Diameter	
Product Weight	1370 g

## Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.	
Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 65

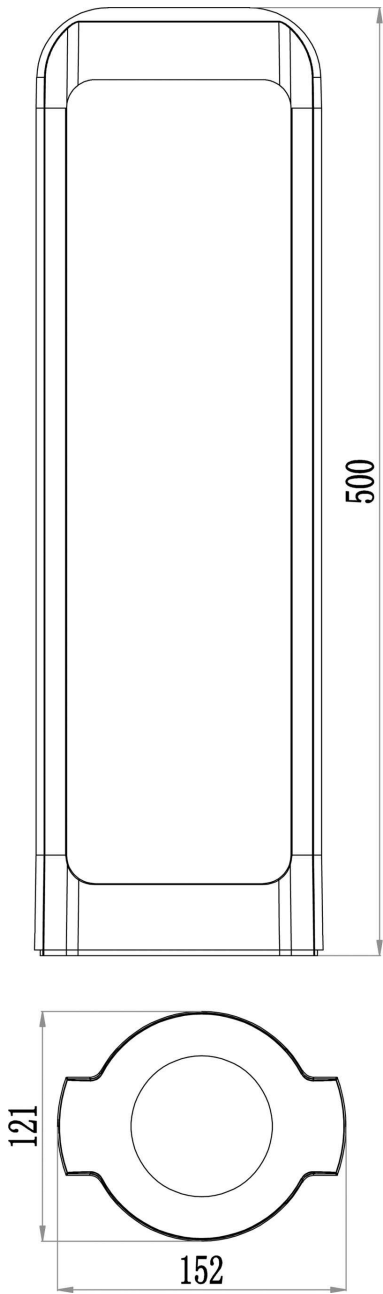

# Product datasheet

Floor lamp, Antliae 50, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite




## General product data

### Environmental Characteristics

Energy label	A
Energy consumption	13 kWh/1000h

### Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,80
Number of switching cycles	15000

IP 65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

# Product datasheet

Floor lamp, Antliae 80, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	3x screws 3x dowels



### Electrical Characteristics

Power / power consumption	12,00 W / 13,00 W
Input Voltage	100-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Connection box
Protection class I, II, III	I

### Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	650 lm
Beam angle	
LED type	COB
LED quantity	1
Spectral power distribution	582 nm



# Product datasheet

Floor lamp, Antliae 80, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite

## Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	


## Dimensions & Weight

Length	152 mm
Width	121 mm
Height	800 mm
Diameter	
Product Weight	1800 g

## Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 65

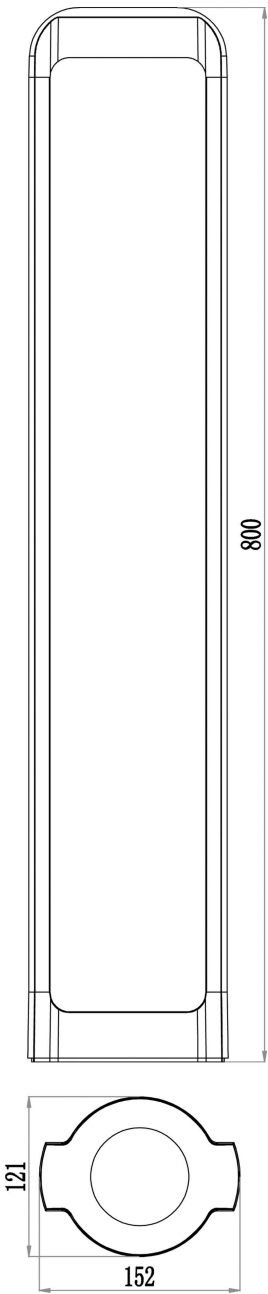



# Product datasheet

Floor lamp, Antliae 80, dark gray, 100-240V AC/50-60Hz, 12,00 W, warmwhite




## General product data

### Environmental Characteristics

Energy label	A
Energy consumption	13 kWh/1000h

### Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,80
Number of switching cycles	15000

IP 65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person