

# Product datasheet

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W



## Technical Data

### General Characteristics

Material	aluminum die casting / glass
Colour	Black grey RAL 7021
Optics	/ clear / transparent
included in delivery	

### Electrical Characteristics

Power	1x max. 50,00 W
Input voltage	
Input current	
Base (standard designation)	GU10
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I

## Product datasheet

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W

### Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

### Dimensions & Weight

Length	108,00
Width	0,00
Height	95,00
Diameter	63,00
Suspensions from ceiling	0,00
Product Weight	

### Base dimensions

Length	0,00
Width	0,00
Height	0,00
Diameter	0,00

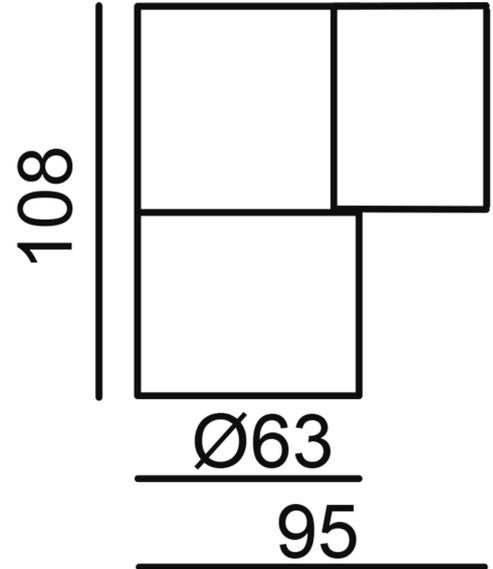

# Product datasheet

---

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W

## Absolute maximum ratings

Working temperature	-20°C - +50°C
Storage temperature	-10°C - +60°C
IP - Code	IP65

---

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
-----	----------------------------------------------------------------------------

---

IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
------	------------------------------------------------------------------------------------------------------------------



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

---

# Product datasheet

Surface mounted wall lamp, Achernar Up and Down, Black grey RAL 7021, 220-240V AC/50-60Hz, 2x max. 35,00 W

## Technical Data

### General Characteristics

Material	aluminum die casting / glass
Colour	Black grey RAL 7021
Optics	/ clear / transparent
included in delivery	



### Electrical Characteristics

Power	2x max. 35,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GU10
Number of bases	2
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I



# Product datasheet

Surface mounted wall lamp, Achernar Up and Down, Black grey RAL 7021, 220-240V AC/50-60Hz, 2x max. 35,00 W

## Light Direction



Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

## Dimensions & Weight

Length (mm)	158,00
Width (mm)	0,00
Height (mm)	95,00
Diameter (mm)	63,00
Suspensions from ceiling (mm)	0,00
Product Weight	489 g

## Base dimensions

Length (mm)	49,00
Width (mm)	58,00
Height (mm)	0,00
Diameter (mm)	0,00

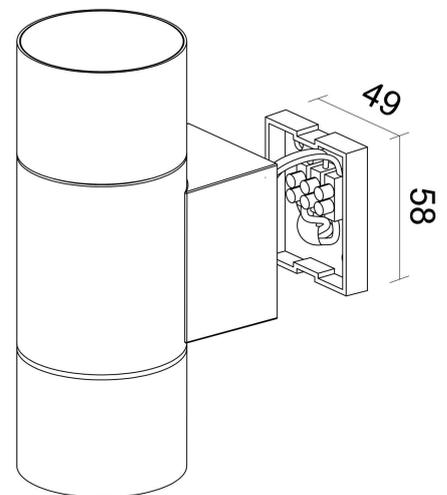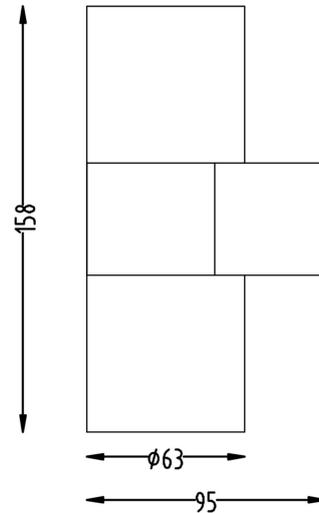

# Product datasheet

---

Surface mounted wall lamp, Achernar Up and Down, Black grey RAL 7021, 220-240V AC/50-60Hz, 2x max. 35,00 W

## Absolute maximum ratings

Working temperature	-20°C - +50°C
Storage temperature	-10°C - +60°C
IP - Code	IP65

---

**IP65**

Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

---