

Product datasheet

Surface mounted wall lamp, Jabbah, dark gray, 220-240V AC/50-60Hz, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	dimnable with dip-switch down to 60%



Electrical Characteristics

Power / power consumption	/ 13,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	dimnable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	915 lm
Beam angle	75°
LED type	COB
LED quantity	2
Spectral power distribution	582 nm



Product datasheet

Surface mounted wall lamp, Jabbah, dark gray, 220-240V AC/50-60Hz, warmwhite

Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	150,00
Width	150,00
Height	150,00
Diameter	0,00
Suspensions from ceiling	0,00
Product Weight	2925 g

Base dimensions

Length	0,00
Width	0,00
Height	0,00
Diameter	0,00

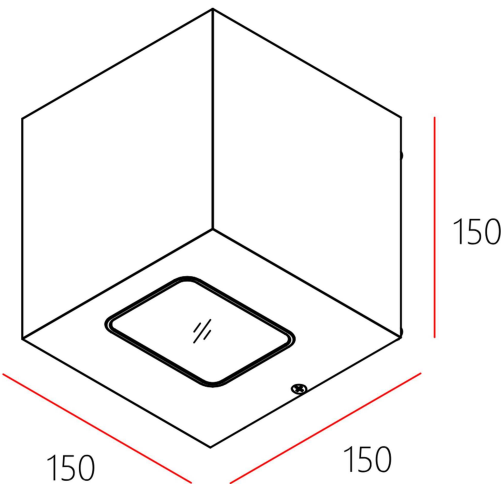

Product datasheet

Surface mounted wall lamp, Jabbar, dark gray, 220-240V AC/50-60Hz, warmwhite

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65




General product data

Environmental Characteristics

Energy label	
Energy consumption	13 kWh/1000h

Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

Product datasheet

Surface mounted wall lamp, Jabbah Up and Down, dark gray, 220-240V AC/50-60Hz, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	dimnable with dip-switch down to 60%



Electrical Characteristics

Power / power consumption	/ 25,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1850 lm
Beam angle	75°
LED type	COB
LED quantity	2
Spectral power distribution	582 nm



Product datasheet

Surface mounted wall lamp, Jabbah Up and Down, dark gray, 220-240V AC/50-60Hz, warmwhite

Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

Dimensions & Weight

Length	150,00
Width	150,00
Height	150,00
Diameter	0,00
Suspensions from ceiling	0,00
Product Weight	3123 g

Base dimensions

Length	0,00
Width	0,00
Height	0,00
Diameter	0,00

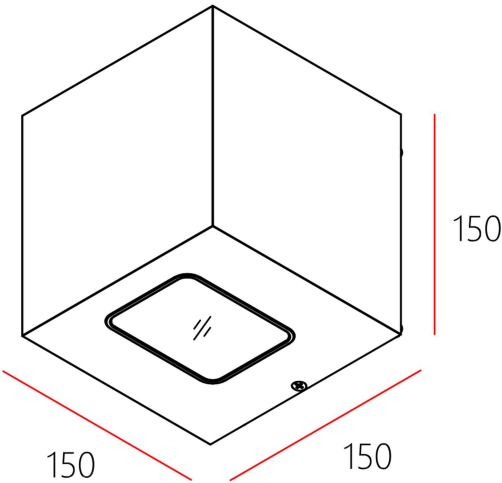

Product datasheet

Surface mounted wall lamp, Jabbah Up and Down, dark gray, 220-240V AC/50-60Hz, warmwhite

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65




General product data

Environmental Characteristics

Energy label	
Energy consumption	25 kWh/1000h

Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person