

Product datasheet

Surface mounted ceiling lamp, Mob Round I, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

Technical Data

General Characteristics

| | |
|----------------------|----------------------|
| Material | aluminum die casting |
| Colour | white |
| Optics | |
| included in delivery | |



Electrical Characteristics

| | |
|-----------------------------|----------------------------|
| Power | 1x max. 9,00 W |
| Input voltage | 220-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | GX53 |
| Number of bases | 1 |
| Power supply unit | |
| Electronically reversible | dimnable via optional bulb |
| Connection possibility | clamp |
| Protection class I, II, III | I |

Product datasheet

Surface mounted ceiling lamp, Mob Round I, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

Light Direction


| | |
|----------------------------|-------|
| Rotating and tilting range | fixed |
| Angle of inclination | |
| Radiation direction | |
| Reflector / lense | |

Dimensions & Weight

| | |
|--------------------------|--------|
| Length | |
| Width | |
| Height | 92 mm |
| Diameter | 108 mm |
| Suspensions from ceiling | |
| Product Weight | 641 g |

Base dimensions

| | |
|----------|--------|
| Length | |
| Width | |
| Height | |
| Diameter | 100 mm |

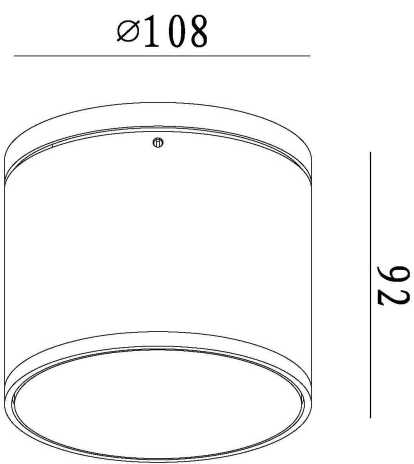


Product datasheet

Surface mounted ceiling lamp, Mob Round I, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -20°C - +40°C |
| Storage temperature | -10°C - +60°C |
| IP - Code | IP54 |

| | |
|---|---|
| EEI | The luminaire is suitable for lamps of energy efficiency classes A++ to E. |
| IP54 | Protection against penetration of dust. (dust protected) Protection against penetration of splashing water. |
|  | Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active. |

Product datasheet

Surface mounted ceiling lamp, Mob Round I, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

Technical Data

General Characteristics

| | |
|----------------------|----------------------|
| Material | aluminum die casting |
| Colour | anthracite |
| Optics | |
| included in delivery | |

Electrical Characteristics

| | |
|-----------------------------|----------------------------|
| Power | 1x max. 9,00 W |
| Input voltage | 220-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | GX53 |
| Number of bases | 1 |
| Power supply unit | |
| Electronically reversible | dimnable via optional bulb |
| Connection possibility | clamp |
| Protection class I, II, III | I |



Product datasheet

Surface mounted ceiling lamp, Mob Round I, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

Light Direction


| | |
|----------------------------|-------|
| Rotating and tilting range | fixed |
| Angle of inclination | |
| Radiation direction | |
| Reflector / lense | |

Dimensions & Weight

| | |
|--------------------------|--------|
| Length | |
| Width | |
| Height | 92 mm |
| Diameter | 108 mm |
| Suspensions from ceiling | |
| Product Weight | 641 g |

Base dimensions

| | |
|----------|--------|
| Length | |
| Width | |
| Height | |
| Diameter | 100 mm |

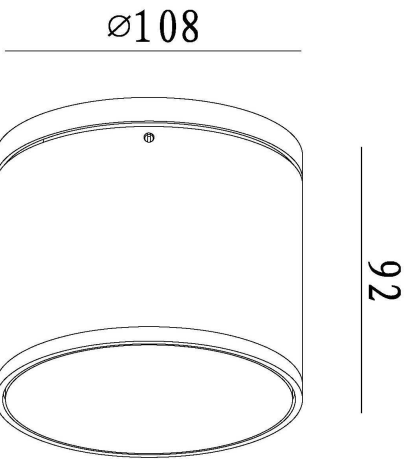


Product datasheet

Surface mounted ceiling lamp, Mob Round I, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -20°C - +40°C |
| Storage temperature | -10°C - +60°C |
| IP - Code | IP54 |

| | |
|---|---|
| EEI | The luminaire is suitable for lamps of energy efficiency classes A++ to E. |
| IP54 | Protection against penetration of dust. (dust protected) Protection against penetration of splashing water. |
|  | Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active. |