

# Product datasheet

Surface mounted ceiling lamp, Mob Square II White, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	white
Optics	
included in delivery	

### Electrical Characteristics

Power	1x max. 9,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GX53
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I




# Product datasheet

Surface mounted ceiling lamp, Mob Square II White, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Light Direction

Rotating and tilting range	fixed
Angle of inclination	0°
Radiation direction	
Reflector / lense	

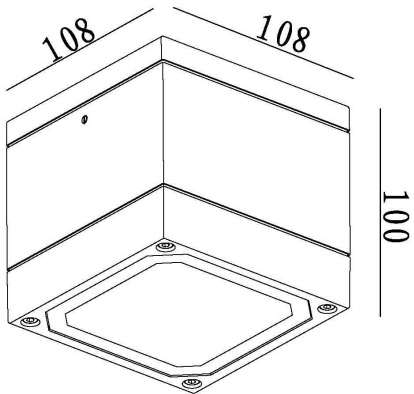

## Dimensions & Weight

Length	108 mm
Width	108 mm
Height	100 mm
Diameter	
Suspensions from ceiling	
Product Weight	653 g

## Base dimensions


Length	108 mm
Width	108 mm
Height	
Diameter	

# Product datasheet

Surface mounted ceiling lamp, Mob Square II White, white, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 54

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP 54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

# Product datasheet

Surface mounted ceiling lamp, Mob Square II Anthracite, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	anthracite
Optics	
included in delivery	



### Electrical Characteristics


Power	1x max. 9,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	GX53
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I

# Product datasheet

Surface mounted ceiling lamp, Mob Square II Anthracite, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

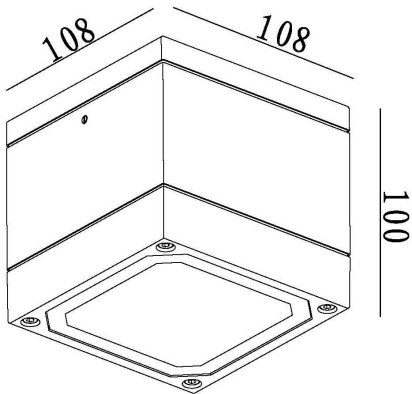

## Dimensions & Weight

Length	108 mm
Width	108 mm
Height	100 mm
Diameter	
Suspensions from ceiling	
Product Weight	653 g

## Base dimensions


Length	108 mm
Width	108 mm
Height	
Diameter	

# Product datasheet

Surface mounted ceiling lamp, Mob Square II Anthracite, anthracite, 220-240V AC/50-60Hz, 1x max. 9,00 W

## Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP54

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.