

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 150,00 W, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	black
Optics	
included in delivery	2,0 m connection cable with plug IP44

Electrical Characteristics

Power / power consumption	150,00 W / 152,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	17500 lm
Beam angle	110°
LED type	SMD
LED quantity	418
Spectral power distribution	583 nm



Product datasheet


Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 150,00 W, warmwhite

Light Direction

Rotating and tilting range	swivel
Angle of inclination	180°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	319 mm
Width	90 mm
Height	411 mm
Diameter	
Product Weight	8000 g

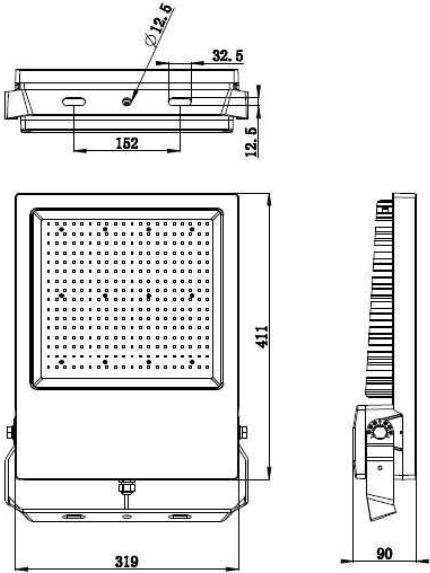

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65/IP44

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 150,00 W, warmwhite

General product data

Environmental Characteristics

Energy label	A+
Energy consumption	152 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 200,00 W, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	black
Optics	
included in delivery	2,0 m connection cable with plug IP44

Electrical Characteristics

Power / power consumption	200,00 W / 202,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	24200 lm
Beam angle	110°
LED type	SMD
LED quantity	320
Spectral power distribution	583 nm



Product datasheet


Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 200,00 W, warmwhite

Light Direction

Rotating and tilting range	swivel
Angle of inclination	180°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	319 mm
Width	90 mm
Height	411 mm
Diameter	
Product Weight	8560 g

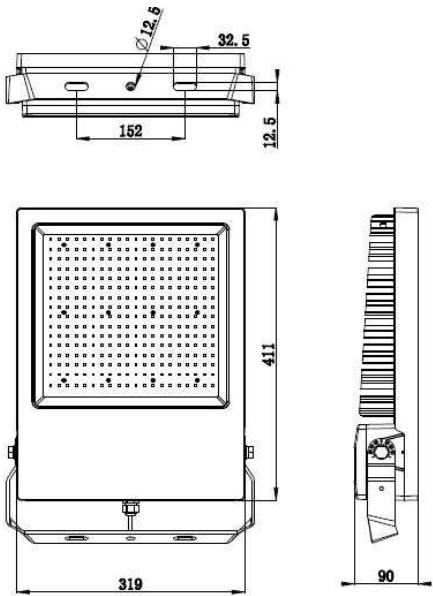

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65/IP44

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 200,00 W, warmwhite

General product data

Environmental Characteristics

Energy label	A+
Energy consumption	202 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 240,00 W, warmwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	black
Optics	
included in delivery	2,0 m connection cable with plug IP44



Electrical Characteristics

Power / power consumption	240,00 W / 242,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	26900 lm
Beam angle	110°
LED type	SMD
LED quantity	320
Spectral power distribution	583 nm



Product datasheet


Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 240,00 W, warmwhite

Light Direction

Rotating and tilting range	swivel
Angle of inclination	180°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	319 mm
Width	90 mm
Height	411 mm
Diameter	
Product Weight	9000 g

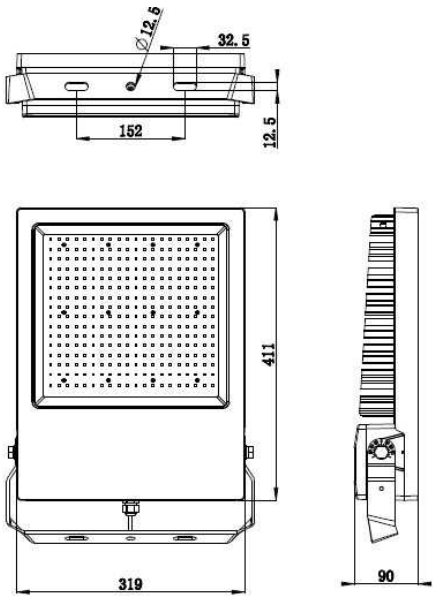

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65/IP44

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 240,00 W, warmwhite

General product data

Environmental Characteristics

Energy label	A+
Energy consumption	242 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 300,00 W, neutral white

Technical Data

General Characteristics

Material	aluminum die casting
Colour	black
Optics	
included in delivery	2,0 m connection cable with plug IP44

Electrical Characteristics

Power / power consumption	300,00 W / 302,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	neutral white
Colour temperature	4000 K
Luminous flux	39900 lm
Beam angle	110°
LED type	SMD
LED quantity	416
Spectral power distribution	577 nm



Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 300,00 W, neutral white

Light Direction

Rotating and tilting range	swivel
Angle of inclination	180°
Radiation direction	
Reflector / lense	symmetrisch


Dimensions & Weight

Length	319 mm
Width	90 mm
Height	411 mm
Diameter	
Product Weight	

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65/IP44

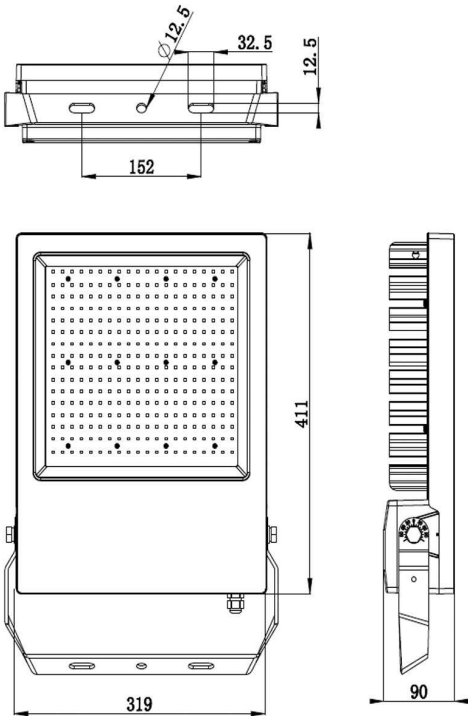

Product datasheet

Ground- / Wall- / Ceiling lamp, Atik, black, 220-240V AC/50-60Hz, 300,00 W, neutral white

General product data

Environmental Characteristics

Energy label	A++
Energy consumption	302 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person