

# Product datasheet

Ground- / Wall- / Ceiling lamp, Wallwasher Caph, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 34,50 W, warmwhite

## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	Graphite grey RAL 7024
Optics	
included in delivery	2,00m Connection cable with plug IP 4+

### Electrical Characteristics

Power / power consumption	34,50 W / 38,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

### Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	2580 lm
Beam angle	40° / 15°
LED type	SMD
LED quantity	24
Spectral power distribution	582 nm



# Product datasheet

Ground- / Wall- / Ceiling lamp, Wallwasher Caph, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 34,50 W, warmwhite

## Light Direction

Rotating and tilting range	swivel
Angle of inclination	
Radiation direction	
Reflector / lense	asymmetrisch


## Dimensions & Weight

Length	1000 mm
Width	53,36 mm
Height	81,07 mm
Diameter	
Product Weight	3120 g

## Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +60°C
Storage temperature	-20°C - +60°C
IP - Code	IP65/IP44

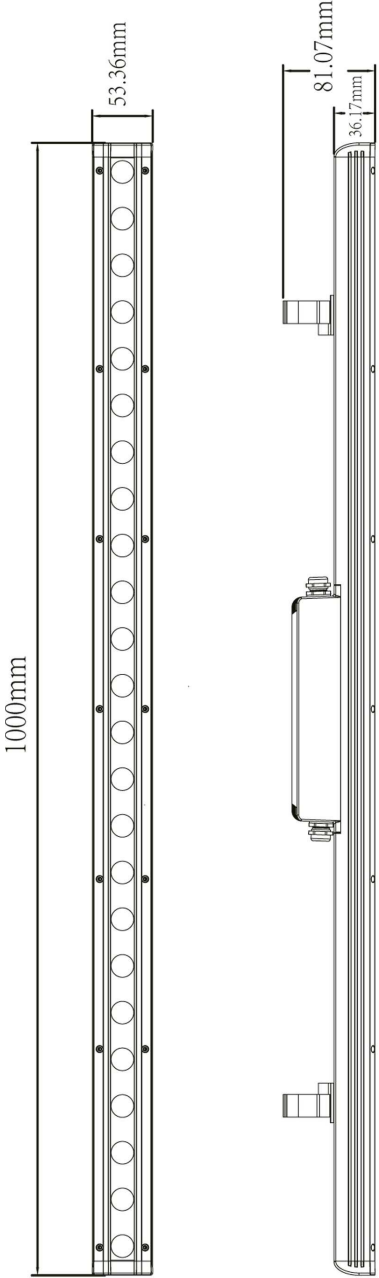

# Product datasheet

Ground- / Wall- / Ceiling lamp, Wallwasher Caph, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 34,50 W, warmwhite

## General product data

### Environmental Characteristics

Energy label	A
Energy consumption	38 kWh/1000h

### Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

### IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person