


Power supply unit, BASIC, DIM, CC, D70040NTF/40W

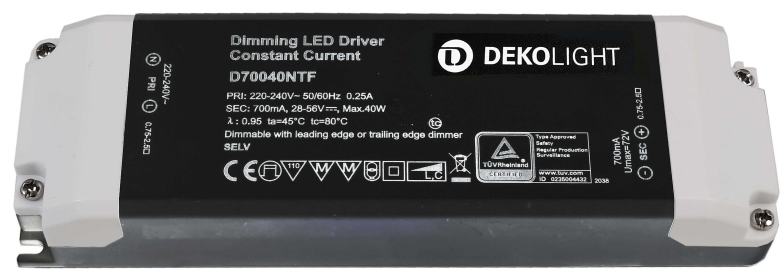

IP20 

Electrical Characteristics


Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	19,60-40,00 W	Power factor	0,95
Output voltage	28-56V DC	Connection possibility	clamp
Output current	700 mA		

Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Power supply unit, BASIC, DIM, CC, D70040NTF/40W

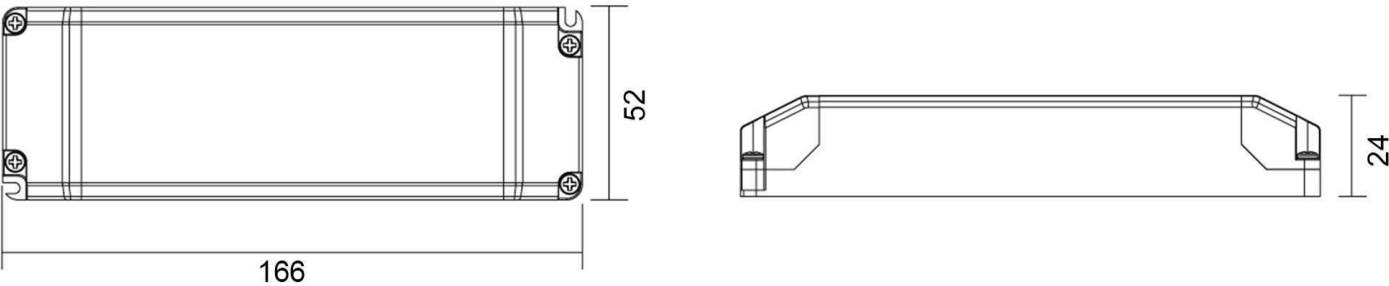

Dimensions & Weight

Absolute maximum ratings

Length	166,00 mm	Operating temperature	-20°C - +50°C
Width	52,00 mm	Case temperature	85 °C
Height	24,00 mm	max. amount of circuit breakers	B10A=35, B16A=56, C10A=74, C16A=118
Diameter	0,00 mm	max. inrush current	5A/300µs
Product weight	190 g	capacitive load	