

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, warmwhite

Technical Data

General Characteristics

Material	aluminum
Colour	Traffic white RAL 9016
Optics	
included in delivery	incl. 2 plastic slices clear and satin



Electrical Characteristics


Power	37,00 W
input voltage	35V DC
input current	1050 mA
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional power supply
Connection possibility	AMP plug
Protection class I, II, III	III

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, warmwhite

Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

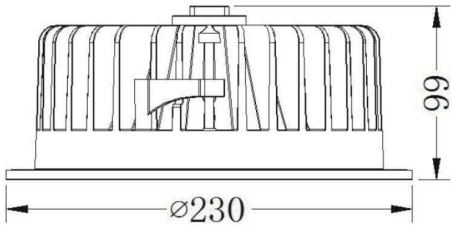

Dimensions & Weight

Length	0,00
Width	0,00
Height	99,00
Diameter	230,00
Mounting Depth	99,00
Product Weight	1420 g

Cut-out dimensions



Length	0,00
Width	0,00
Diameter	210,00

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, warmwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP20

EEL	This product contains a light source of energy efficiency class G
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, neutral white

Technical Data

General Characteristics

Material	aluminum
Colour	Traffic white RAL 9016
Optics	
included in delivery	incl. 2 plastic slices clear and satin



Electrical Characteristics


Power	37,00 W
input voltage	35V DC
input current	1050 mA
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional power supply
Connection possibility	AMP plug
Protection class I, II, III	III

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, neutral white

Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

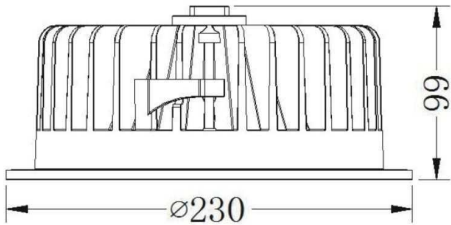

Dimensions & Weight

Length	0,00
Width	0,00
Height	99,00
Diameter	230,00
Mounting Depth	99,00
Product Weight	1420 g

Cut-out dimensions



Length	0,00
Width	0,00
Diameter	210,00

Product datasheet

Built in ceiling lamp, COB 210, Traffic white RAL 9016, 35V DC, neutral white

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP20

EEL	This product contains a light source of energy efficiency class G
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.