

Product datasheet

Track system 3-Phases 230V, Can, white, 220-240V AC/50-60Hz, 1x max. 7,50 W



Technical Data

General Characteristics

| | |
|----------------------|----------------------|
| Material | aluminum die casting |
| Colour | white |
| Optics | |
| included in delivery | |


Electrical Characteristics

| | |
|-----------------------------|---------------------|
| Power | 1x max. 7,50 W |
| Input Voltage | 220-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | GU10 |
| Number of Bases | 1 |
| Power supply unit | |
| Connection possibility | adapter |
| Protection class I, II, III | I |



Product datasheet

Track system 3-Phases 230V, Can, white, 220-240V AC/50-60Hz, 1x max. 7,50 W

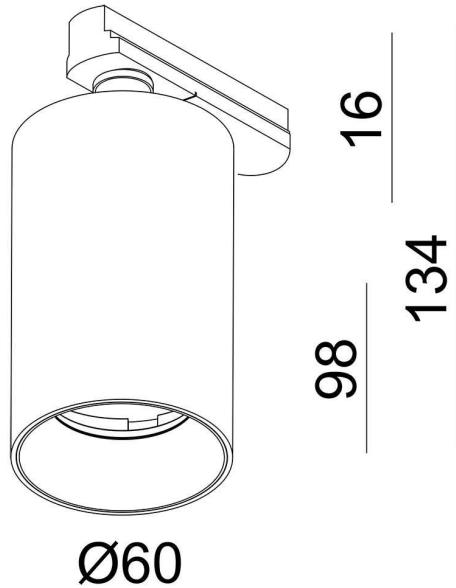

Light Direction

| | |
|----------------------------|------------------|
| Rotating and tilting range | rotatable-swivel |
| Angle of inclination | 90° |
| Radiation direction | |
| Reflector / lense | |

Dimensions & Weight

| | |
|----------------|--------|
| Length | 134 mm |
| Width | |
| Height | |
| Diameter | 60 mm |
| Product Weight | 232 g |

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -5°C - +40°C |
| Storage temperature | -10°C - +40°C |
| IP - Code | IP20 |

| | |
|------|--|
| EEI | The luminaire is suitable for lamps of energy efficiency classes A++ to E. |
| IP20 | Protection against penetration of foreign objects > 50 mm. No protection against penetration of water. |
| | Lightnings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active. |
| | Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED. |

Product datasheet

Track system 3-Phases 230V, Can, silver, 220-240V AC/50-60Hz, 1x max. 7,50 W



Technical Data

General Characteristics

| | |
|----------------------|----------------------|
| Material | aluminum die casting |
| Colour | silver |
| Optics | |
| included in delivery | |


Electrical Characteristics

| | |
|-----------------------------|---------------------|
| Power | 1x max. 7,50 W |
| Input Voltage | 220-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | GU10 |
| Number of Bases | 1 |
| Power supply unit | |
| Connection possibility | adapter |
| Protection class I, II, III | I |



Product datasheet

Track system 3-Phases 230V, Can, silver, 220-240V AC/50-60Hz, 1x max. 7,50 W

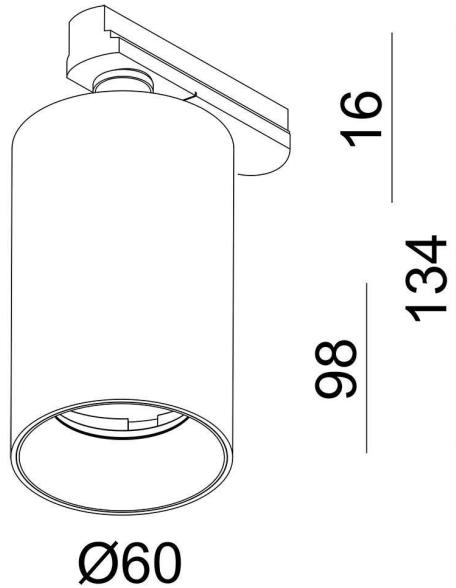

Light Direction

| | |
|----------------------------|------------------|
| Rotating and tilting range | rotatable-swivel |
| Angle of inclination | 90° |
| Radiation direction | |
| Reflector / lense | |

Dimensions & Weight

| | |
|----------------|--------|
| Length | 134 mm |
| Width | |
| Height | |
| Diameter | 60 mm |
| Product Weight | 232 g |

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -5°C - +40°C |
| Storage temperature | -10°C - +40°C |
| IP - Code | IP20 |

| | |
|------|--|
| EEI | The luminaire is suitable for lamps of energy efficiency classes A++ to E. |
| IP20 | Protection against penetration of foreign objects > 50 mm. No protection against penetration of water. |
| | Lightnings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active. |
| | Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED. |

Product datasheet

Track system 3-Phases 230V, Can, black, 220-240V AC/50-60Hz, 1x max. 7,50 W



Technical Data

General Characteristics

| | |
|----------------------|-------------------------|
| Material | aluminum die casting |
| Colour | black |
| Optics | |
| included in delivery | 1x reflector ring black |


Electrical Characteristics

| | |
|-----------------------------|---------------------|
| Power | 1x max. 7,50 W |
| Input Voltage | 220-240V AC/50-60Hz |
| Input current | |
| Base (standard designation) | GU10 |
| Number of Bases | 1 |
| Power supply unit | |
| Connection possibility | adapter |
| Protection class I, II, III | I |



Product datasheet

Track system 3-Phases 230V, Can, black, 220-240V AC/50-60Hz, 1x max. 7,50 W

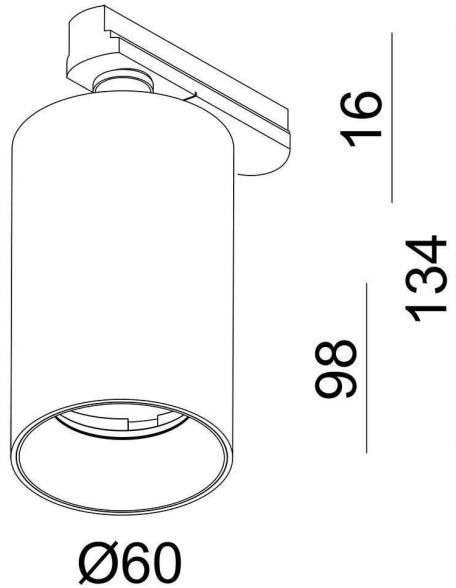

Light Direction

| | |
|----------------------------|------------------|
| Rotating and tilting range | rotatable-swivel |
| Angle of inclination | 90° |
| Radiation direction | |
| Reflector / lense | |

Dimensions & Weight

| | |
|----------------|--------|
| Length | 134,00 |
| Width | 0,00 |
| Height | 0,00 |
| Diameter | 60,00 |
| Product Weight | 239 g |

Absolute maximum ratings

| | |
|---------------------|---------------|
| Working temperature | -5°C - +40°C |
| Storage temperature | -10°C - +40°C |
| IP - Code | IP20 |

IP20 Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I

in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.