

# Product datasheet

Pendant lamp, Filo Sat, silver, 220-240V AC/50-60Hz, 3x max. 60,00 W

## Technical Data

### General Characteristics

Material	metal / aluminum
Colour	silver
Optics	
included in delivery	



### Electrical Characteristics

Power	3x max. 60,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of bases	3
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I

# Product datasheet

Pendant lamp, Filo Sat, silver, 220-240V AC/50-60Hz, 3x max. 60,00 W

## Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

## Dimensions & Weight

Length	0,00
Width	0,00
Height	180,00
Diameter	390,00
Suspensions from ceiling	1,00
Product Weight	2565 g

## Base dimensions

Length	0,00
Width	0,00
Height	25,00
Diameter	100,00

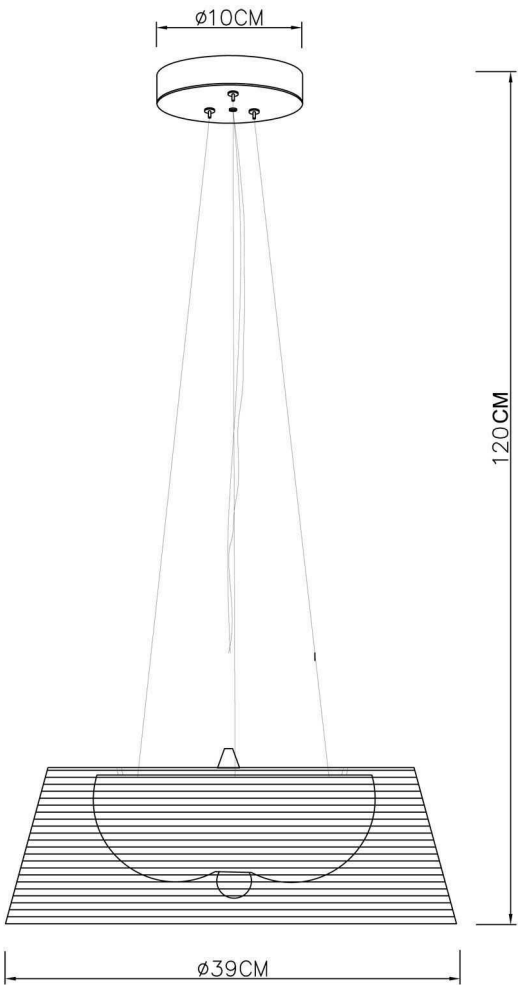


# Product datasheet

Pendant lamp, Filo Sat, silver, 220-240V AC/50-60Hz, 3x max. 60,00 W

## Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-5°C - +40°C
IP - Code	IP20

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.