

# Product datasheet

Pendant lamp, Lucea 10 White, Traffic white RAL 9016, 220-240V AC/50-60Hz, warm white + neutral white



## Technical Data

### General Characteristics

Material	aluminum / PMMA
Colour	Traffic white RAL 9016
Optics	/ transparent
included in delivery	

### Electrical Characteristics

Power	10,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	leading/trailing edge
Connection possibility	clamp
Protection class I, II, III	I

### Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warm white + neutral white
Colour temperature	3000/4000 K
Luminous flux	1000 lm
Beam angle	36°
LED type	COB
LED quantity	1
Spectral power distribution	596 nm



# Product datasheet

Pendant lamp, Lucea 10 Black, Jet black RAL 9005, 220-240V AC/50-60Hz, warm white + neutral white



## Technical Data

### General Characteristics

Material	aluminum / PMMA
Colour	Jet black RAL 9005
Optics	/ transparent
included in delivery	

### Electrical Characteristics

Power	10,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	leading/trailing edge
Connection possibility	clamp
Protection class I, II, III	I


### Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warm white + neutral white
Colour temperature	3000/4000 K
Luminous flux	930/1000 lm
Beam angle	36°
LED type	COB
LED quantity	1
Spectral power distribution	596 nm



# Product datasheet

Pendant lamp, Lucea 10 Black, Jet black RAL 9005, 220-240V AC/50-60Hz, warm white + neutral white

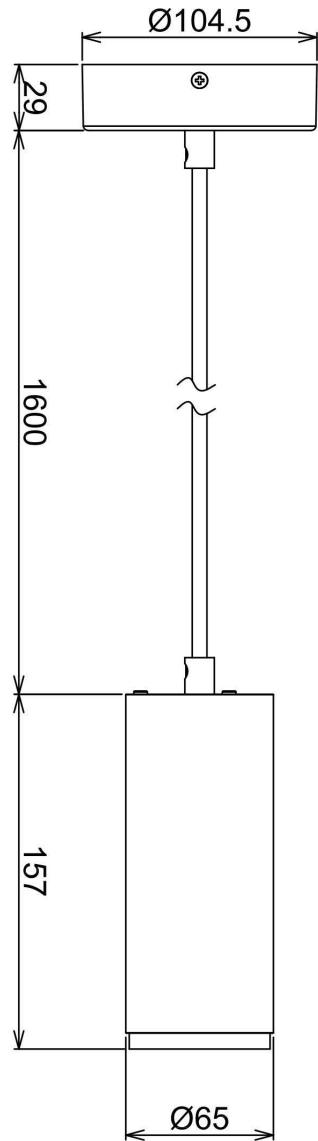

## Light Direction

Rotating and tilting range
Angle of inclination
Radiation direction
Reflector / lense

## Dimensions & Weight

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	157,00
Diameter (mm)	65,00
Suspensions from ceiling (mm)	1600,00
Product Weight	

## Base dimensions

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	0,00
Diameter (mm)	0,00

# Product datasheet

Pendant lamp, Lucea 10 Black, Jet black RAL 9005, 220-240V AC/50-60Hz, warm white + neutral white

## Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-20°C - +65°C
IP - Code	IP20

## General product data

### Environmental Characteristics

Energy label	F
Energy consumption	10 kWh/1000h


### Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,7
Number of switching cycles	100000

EEI	This product contains a light source of energy efficiency class F
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

# Product datasheet

Pendant lamp, Lucea 10 White, Traffic white RAL 9016, 220-240V AC/50-60Hz, warm white + neutral white

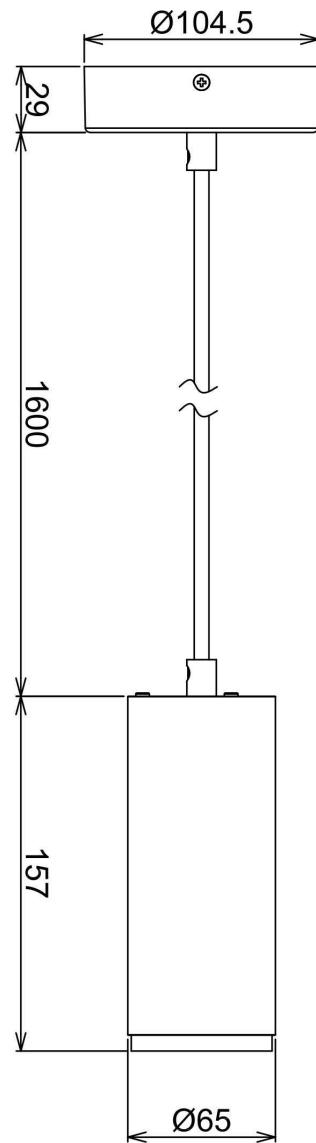

## Light Direction

Rotating and tilting range
Angle of inclination
Radiation direction
Reflector / lense

## Dimensions & Weight

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	157,00
Diameter (mm)	65,00
Suspensions from ceiling (mm)	1600,00
Product Weight	

## Base dimensions

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	0,00
Diameter (mm)	0,00

# Product datasheet

---

Pendant lamp, Lucea 10 White, Traffic white RAL 9016, 220-240V AC/50-60Hz, warm white + neutral white

## Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-20°C - +65°C
IP - Code	IP20

## General product data

### Environmental Characteristics

Energy label	F
Energy consumption	10 kWh/1000h

### Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,7
Number of switching cycles	100000

EEI	This product contains a light source of energy efficiency class F
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightnings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.