

# Product datasheet

Energy distributor, Socket Tower Kukui Puka, dark gray, 220-240V AC/50-60Hz, 1x max. 13 W



## Technical Data

### General Characteristics

Material	aluminum die casting
Colour	dark gray
Optics	
included in delivery	


### Electrical Characteristics

Power	1x max. 13 W
max. Connection Power	3680 W
Input Voltage	220-240V AC/50-60Hz
Input current	16 A
Base (standard designation)	E27
Number of Bases	
Power supply unit	
Connection possibility	Connection box IP68
Protection class I, II, III	I



# Product datasheet

Energy distributor, Socket Tower Kukui Puka, dark gray, 220-240V AC/50-60Hz, 1x max. 13 W

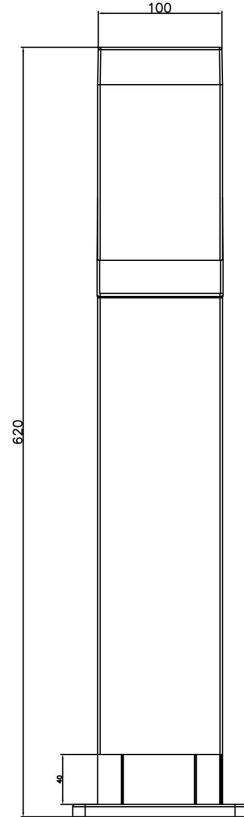

## Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

## Dimensions & Weight

Length	140,00
Width	140,00
Height	620,00
Diameter	0,00
Product Weight	2130 g

## Absolute maximum ratings

Working temperature	-20°C - +45°C
Storage temperature	-10°C - +50°C
IP - Code	IP44



**IP44** Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.

Lightings of Protection Class I



in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.