


# Product datasheet

Pendant lamp, Slim, 15 W, 3000 K, White, Traffic white RAL 9016, 200-240V AC/50-60Hz, warmwhite

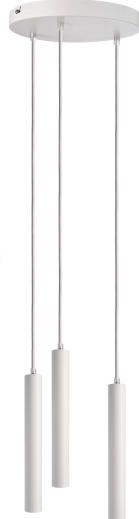

## Technical Data

### General Characteristics

Material	aluminum / glass
Colour	Traffic white RAL 9016
Optics	/ clear / transparent
included in delivery	

### Electrical Characteristics

Power	15,00 W
Input voltage	200-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	
Protection class I, II, III	I

### Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1500 lm
Beam angle / UGR	24° / 19
LED type	COB
LED quantity	3
Spectral power distribution	



# Product datasheet

Pendant lamp, Slim, 15W, 3000 K, White, Traffic white RAL 9016, 200-240V AC/50-60Hz, warmwhite

## Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	
Reflector / lense	

## Dimensions & Weight

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	300,00
Diameter (mm)	39,00
Suspensions from ceiling (mm)	1800,00
Product Weight	

## Base dimensions

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	0,00
Diameter (mm)	0,00

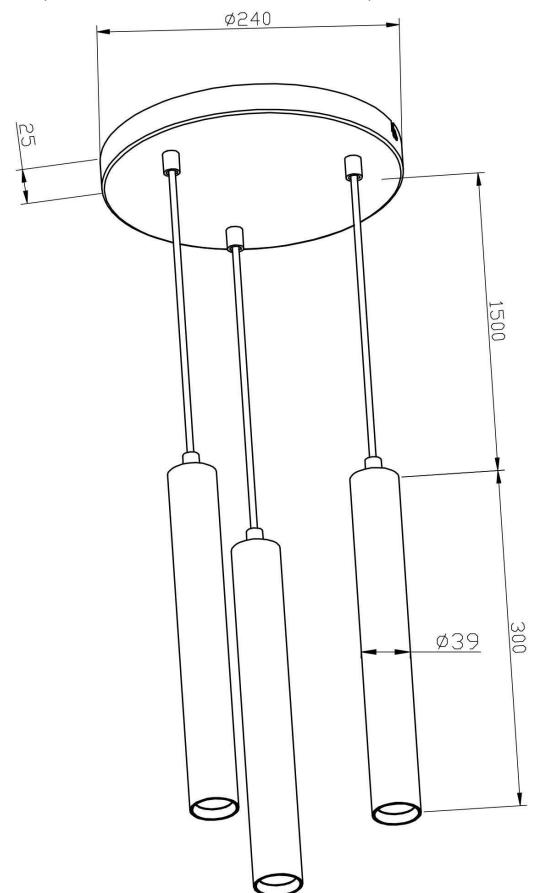

# Product datasheet

Pendant lamp, Slim, 15 W, 3000 K, White, Traffic white RAL 9016, 200-240V AC/50-60Hz, warmwhite

## Absolute maximum ratings

Working temperature	-20°C - +45°C
Storage temperature	-20°C - +65°C
IP - Code	IP20

## General product data

### Environmental Characteristics

Energy label	E
Energy consumption	15 kWh/1000h

### Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,7
Number of switching cycles	100000

EEI This product contains a light source of energy efficiency class E

IP20 Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I

in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.