

Article No.: 872628

Power supply unit, FLAT, CC, UT350mA/6W



IP20 

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	0,70-6,00 W	Power factor	0,5
Output voltage	2-18V DC	Connection possibility	wire with open ends
Output current	350 mA		

Product features


 Protection class II	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Product datasheet

Article No.: 872628

Power supply unit, FLAT, CC, UT350mA/6W

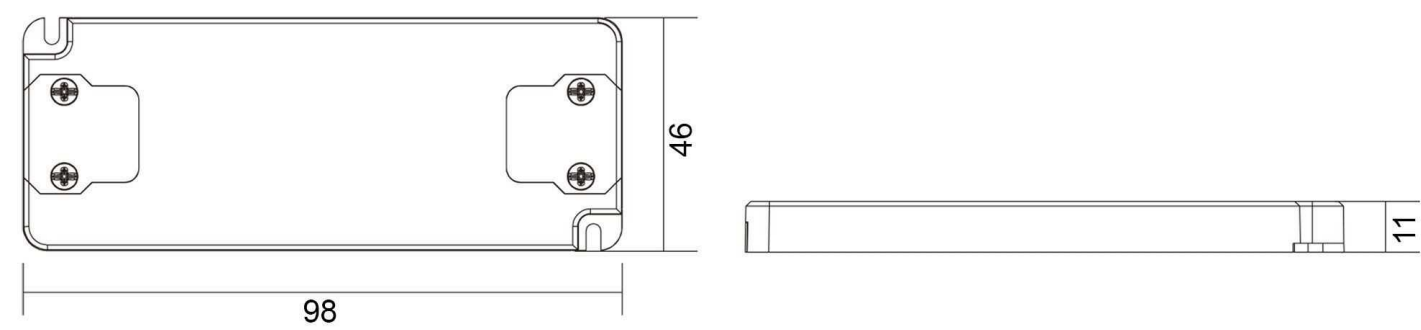

Dimensions & Weight

Absolute maximum ratings

Length	98,00 mm	Operating temperature	-20°C - +50°C
Width	46,00 mm	Case temperature	80 °C
Height	11,00 mm	max. amount of circuit breakers	B10A=17, B16A=28, C10A=37, C16A=59
Diameter	0,00 mm	max. inrush current	10A/300µs
Product weight	42 g	capacitive load	40,44nF