

Product datasheet

Floor lamp, Faro, 24 W, DALI, 3000 K, Gray, Dark gray, 200-240 V/AC 50 / 60 Hz, Warm white (WW)



Technical Data

General Characteristics

Material	Die-cast aluminium
Colour	Dark gray
Optics	
included in delivery	

Electrical Characteristics

Power	24,0 W
Input Voltage	200-240 V/AC 50 / 60 Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	DALI 2.0 / DT6
Connection possibility	Clamp
Protection class I, II, III	I

Light Technical Data

Bulb	LED;Lichtquelle wechselbar TC
Colour Designation	Warm white (WW)
Colour temperature	3000 K
Luminous flux	1030 lm
Beam angle	360 Grad
LED type	
LED quantity	108
Spectral power distribution	




Product datasheet

Floor lamp, Faro, 24 W, DALI, 3000 K, Gray, Dark gray, 200-240 V/AC 50 / 60 Hz, Warm white (WW)

Light Direction

Rotating and tilting range	
Angle of inclination	
Radiation direction	Seite;Unten
Reflector / lense	Symmetrisch

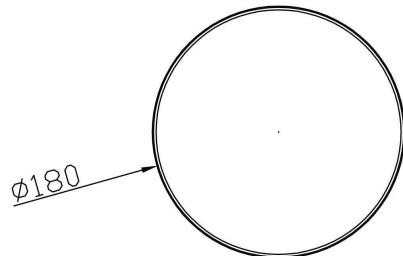


Dimensions & Weight

Length	0,00
Width	0,00
Height	600,00
Diameter	180,00
Product Weight	4200 g

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-30 bis 45 °C
Storage temperature	-30 bis 60 °C
IP - Code	IP 65

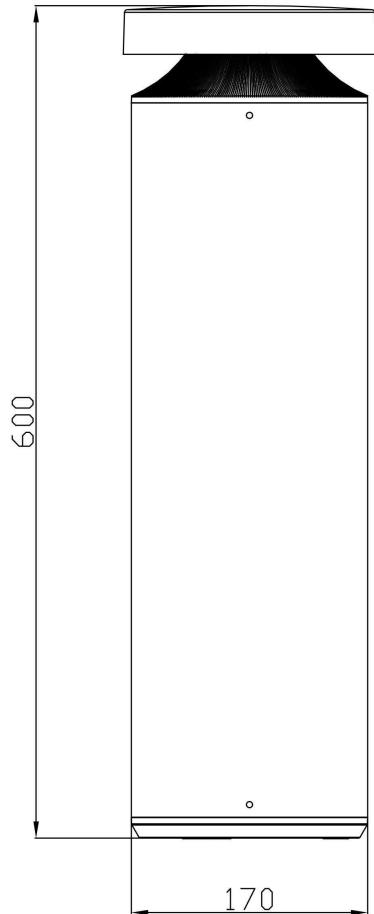

Product datasheet

Floor lamp, Faro, 24 W, DALI, 3000 K, Gray, Dark gray, 200-240 V/AC 50 / 60 Hz, Warm white (WW)

Environmental Characteristics

Energy label	
Energy consumption	24 kWh/1000h

Lifespan

Rated Life Time L70 / B50	50000 h
Luminous flux (end of lifetime)	0,7
Number of switching cycles	100000

EEI This product contains a light source of energy efficiency class C

IP 65

Lightings of Protection Class I
in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.

Floor lamp, Faro 25, 24 W, DALI, 3000 K, gray, Article No.: 730492-494

Dear customer,

thank you for deciding to purchase our product. The product fulfils the requirements of effective European and national guidelines.

To maintain the condition of the product and to ensure safe operation, you - as the user - must observe the product notes and the operation manual! They contain important information for the start-up and handling. It is important, therefore, that these documents are archived carefully for referring to information at a later stage.

1. Safety Instructions

We are not responsible for any property damage or personal injury caused by failure to observe these product notes and manual, improper handling or unauthorised modifications.

It can only be installed by a qualified electrician.

Make sure that the item has not been damaged during transport before putting the light into operation. It may not be operated if there are any damages to electrical parts.

It may only be operated once removed from the packaging.

The type plate must not be removed.

The connection lines in the building must be disconnected before installation and secured against being switched back on.

Make sure the electrical specifications for the connection lines correspond with the specifications given on the nameplate of this product.

We recommend that you protect the product with a residual-current-operated protective device. Follow all installation regulations applicable at your location.

Make sure that the cables and plugs are not subject to tension or torsional forces and do not bend the cables. Protect all cables and insulation against possible damages.

Output lines should be laid separately and spaced apart from other lines. The power supply cables and the lamp feeders must not cross each other.

Do not allow the product to come into contact with extreme heat or naked flames.

Use the supplied fastening material only when it is suited for the installation background.

The product must not be covered with objects (decorations) or thermally insulating coverings /similar materials.

Before disposal of the packaging material make sure that all components are removed.

Keep packaging material away from the reach of children and pets. The packaging contains small parts that may be swallowed by children.

Floor lamp, Faro 25, 24 W, DALI, 3000 K, gray, Article No.: 730492-494

2. Proper Use

This product is only intended for lighting purposes and may only be operated on normal or non-flammable surfaces.

The use can be done in indoor/outdoor areas.

Make sure that the surface is suitable for permanently and reliably taking the weight of the light.

3. Care

Repairs may only be carried out by a qualified electrician.

Disconnect the entire product from the mains first and allow it to cool down before cleaning or maintaining.

Use a dry or slightly moistened cloth for cleaning.

Never use any chemicals, flammable cleaning agents or abrasives. These may cause damage to the surface coating and/or the insulators.

4. Faulty Function

Light switched on at the switch?

Transformer mounted and connected properly?

If available; remote control intact? Check the batteries.

Check the connected lines.

Lamp defective?

5. Changing Lamps

The light source of this lamp is not replaceable. When the light source has reached its end of life, replace the entire luminaire.

6. Storage and Disposal

Used electronic devices must be brought back to public collection points and must not be disposed of as household waste.

Storage in a dry and clean environment. Do not strain the product mechanically during storage.

Montageanleitung / Mounting Instruction

Artikel Nr. / Article No.: 730492 / 730493 / 730494


Pollerleuchte Faro / Bollard Faro
200-240 V/AC, 24,0 W, DALI

Achtung! Für diese Arbeiten müssen Sie die Spannungsversorgung trennen.
Attention! For this work you must turn off the power supply.


Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.
This product contains a light source of energy efficiency class C.

1 - benötigter Raum / required space

300 x 300 x 150 mm

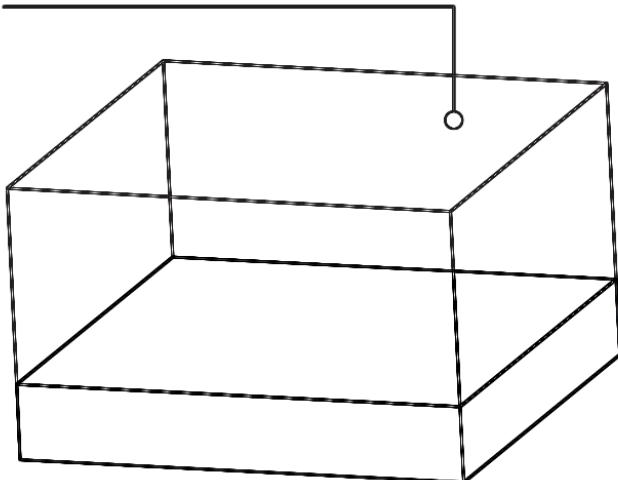


2 - Positionierung Leerrohr / positioning empty tube

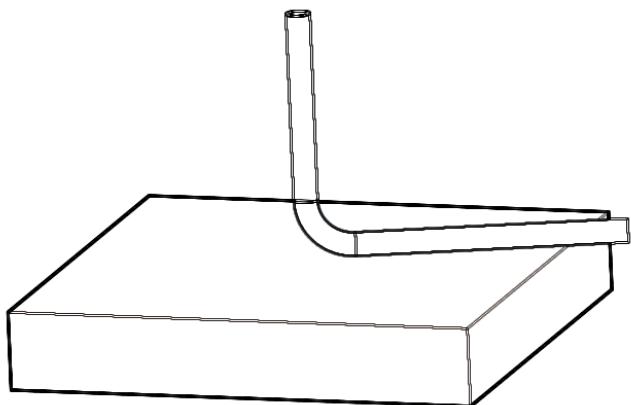


Leerrohr nicht im Lieferumfang /
empty tube not included

3 - Fundamentbetonblock / foundation concrete block

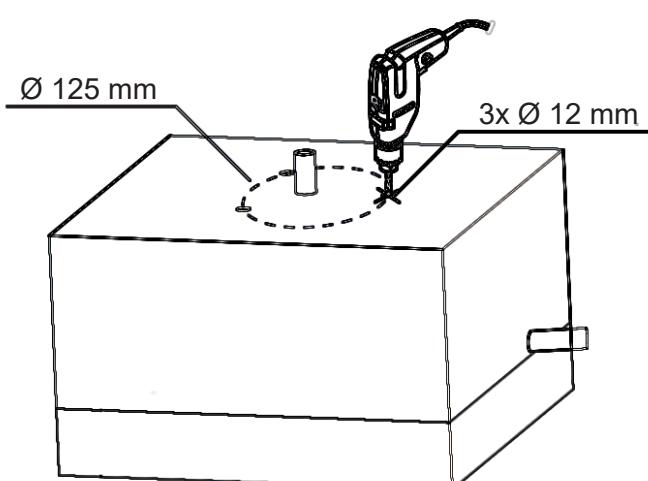

4 - Zuleitung verlegen / lay the supply line

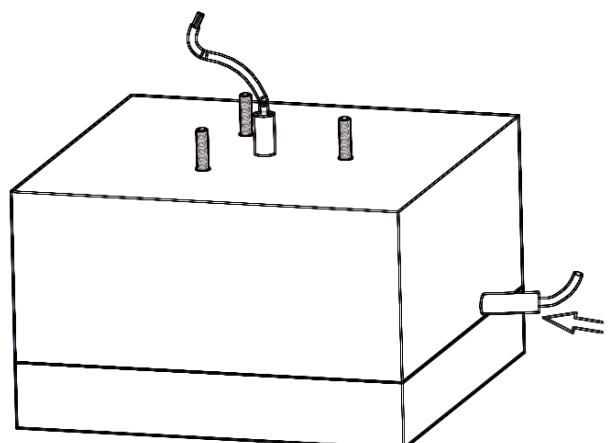

im Lieferumfang 3x Dehnschrauben /
included 3x expansion screws

Montageanleitung / Mounting Instruction

Artikel Nr. / Article No.: 730492 / 730493 / 730494

Pollerleuchte Faro / Bollard Faro - 200-240 V/AC, 24,0 W, DALI

Achtung! / Attention!

Wenn Sie die 180° Abschirmblende 930776 verwenden möchten, beachten Sie bitte den Hinweis zur Ausrichtung. /
If you want to use the 180° shielding screen 930776, please note the information on alignment.



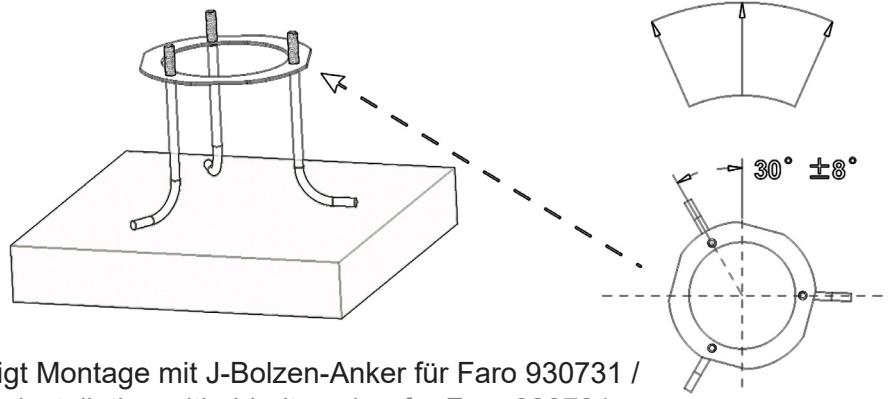


Abbildung zeigt Montage mit J-Bolzen-Anker für Faro 930731 /
Picture shows installation with J-bolt anchor for Faro 930731

5 - befestigen der Montageplatte / attach the mounting plate

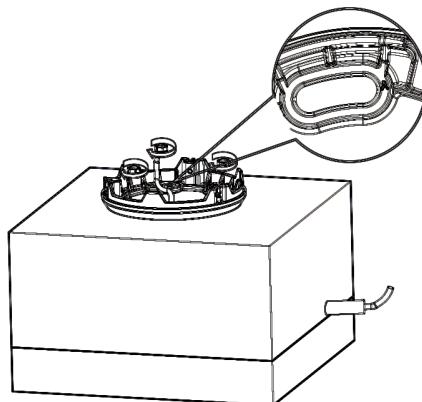


6 - befestigen des Leuchtenkopfes / attach the lamp head

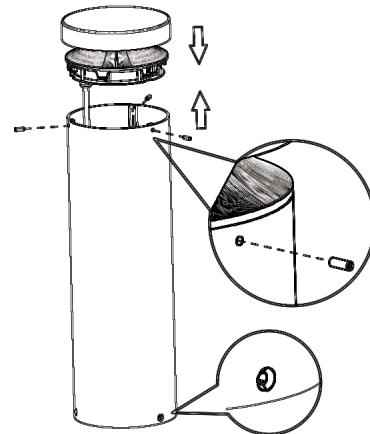

7 - elektrischer Anschluss / electrical connection

N = Blau • Blue
G = Gelb / Grün • Yellow / Green
L = Braun • Brown

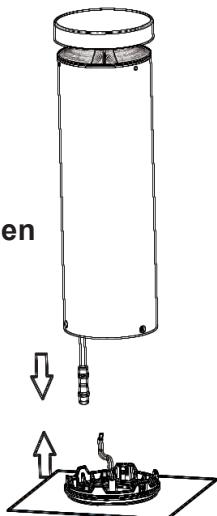

8 - Leuchte mit der Montageplatte verbinden / connect the lamp to the mounting plate

