

Floor lamp, Office Three Standard, Motion, 80 W, DIM, 4000 K, white, Article No.: 342228-230

Dear customer,

thank you for deciding to purchase our product. The product fulfils the requirements of effective European and national guidelines.

To maintain the condition of the product and to ensure safe operation, you - as the user - must observe the product notes and the operation manual! They contain important information for the start-up and handling. It is important, therefore, that these documents are archived carefully for referring to information at a later stage.

1. Safety Instructions

We are not responsible for any property damage or personal injury caused by failure to observe these product notes and manual, improper handling or unauthorised modifications.

It can only be installed by a qualified electrician.

Make sure that the item has not been damaged during transport before putting the light into operation. It may not be operated if there are any damages to electrical parts.

It may only be operated once removed from the packaging.

The type plate must not be removed.

The connection lines in the building must be disconnected before installation and secured against being switched back on.

Make sure the electrical specifications for the connection lines correspond with the specifications given on the nameplate of this product.

We recommend that you protect the product with a residual-current-operated protective device. Follow all installation regulations applicable at your location.

Make sure that the cables and plugs are not subject to tension or torsional forces and do not bend the cables. Protect all cables and insulation against possible damages.

Output lines should be laid separately and spaced apart from other lines. The power supply cables and the lamp feeders must not cross each other.

Do not allow the product to come into contact with extreme heat or naked flames.

Use the supplied fastening material only when it is suited for the installation background.

The product must not be covered with objects (decorations) or thermally insulating coverings /similar materials.

Before disposal of the packaging material make sure that all components are removed.

Keep packaging material away from the reach of children and pets. The packaging contains small parts that may be swallowed by children.

Floor lamp, Office Three Standard, Motion, 80 W, DIM, 4000 K, white, Article No.: 342228-230

2. Proper Use

This product is only intended for lighting purposes and may only be operated on normal or non-flammable surfaces.

Use the product only in protected and dry interior rooms.

Make sure that the surface is suitable for permanently and reliably taking the weight of the light.

3. Care

Repairs may only be carried out by a qualified electrician.

Disconnect the entire product from the mains first and allow it to cool down before cleaning or maintaining.

Use a dry or slightly moistened cloth for cleaning.

Never use any chemicals, flammable cleaning agents or abrasives. These may cause damage to the surface coating and/or the insulators.

4. Faulty Function

Light switched on at the switch?

Transformer mounted and connected properly?

If available; remote control intact? Check the batteries.

Check the connected lines.

Lamp defective?

5. Changing Lamps

The light source of this lamp is not replaceable. When the light source has reached its end of life, replace the entire luminaire.

6. Storage and Disposal

Used electronic devices must be brought back to public collection points and must not be disposed of as household waste.


Storage in a dry and clean environment. Do not strain the product mechanically during storage.

Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W


Achtung! Für diese Arbeiten müssen Sie die Spannungsversorgung trennen.
Attention! For this work you must turn off the power supply.

Aufbau / Mounting

1

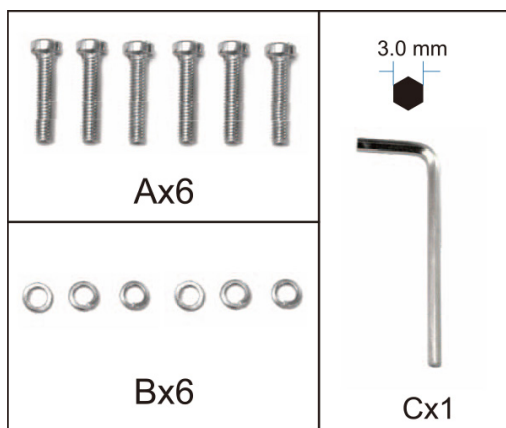


2

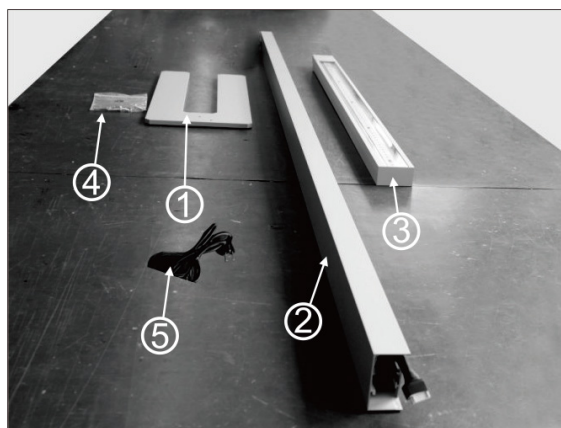


3

1. Grundplatte / Base plate
2. Leuchtenstange / Lamp pole
3. Leuchtenkopf / Lamp body
4. Zubehörtasche / Accessories bag
5. Anschlusskabel / Power cable


4

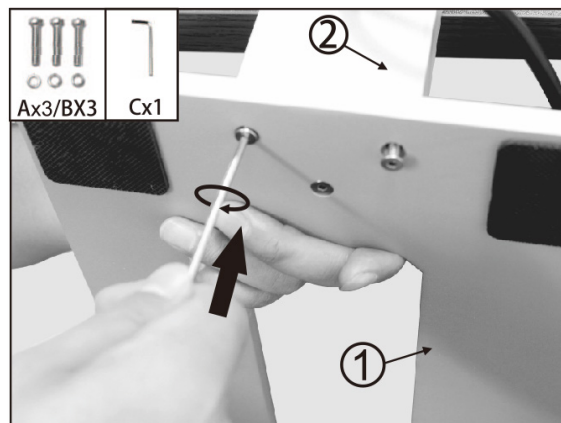

5

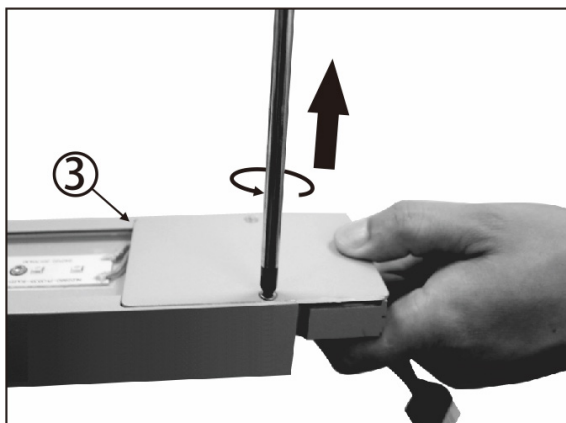

6

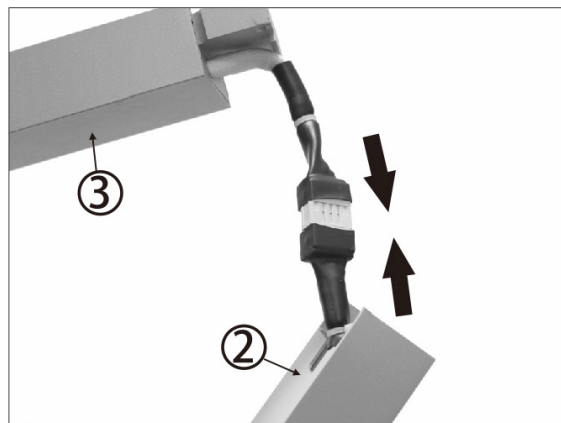


Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W


7




8

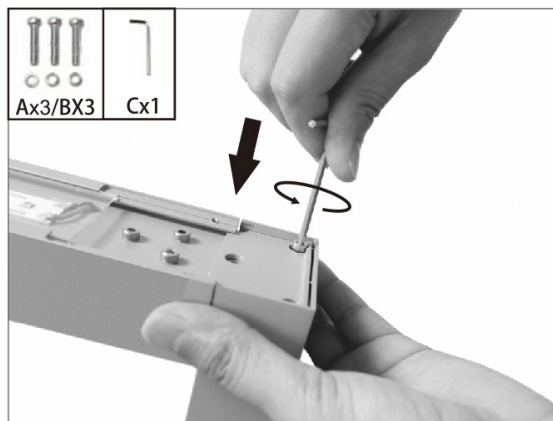

9

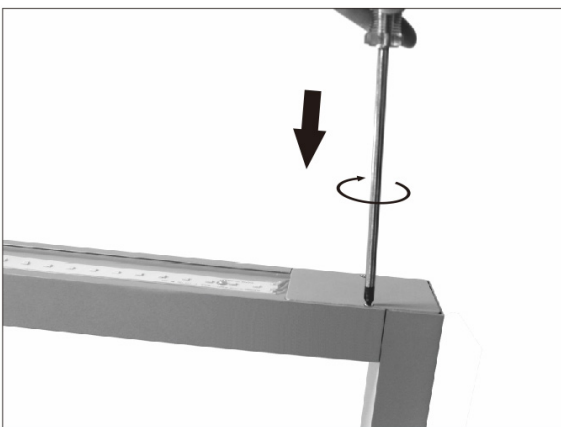

10

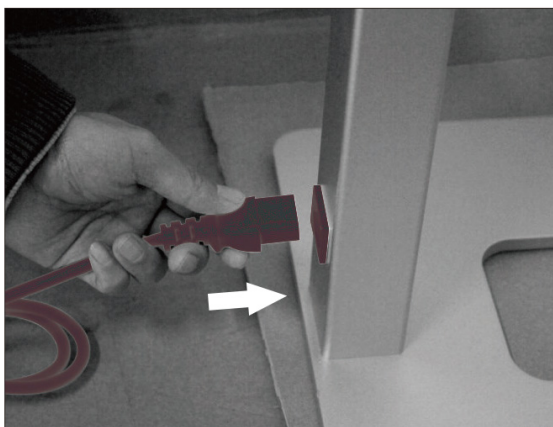

11



Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W

Dieses Produkt enthält Lichtquellen der Energieeffizienzklassen D und F.
This product contains light sources of energy efficiency classes D and F.


Steuerung / Adjustment	
	Licht oben / up light
	 < 0,5 s = 
	 > 1,0 s = 
	Licht komplett / complete light
	 < 0,5 s = 
	behält das Licht als vorherigen Status automatisch bei / will keep light as previous status automatically
	Licht unten / down light
	 < 0,5 s = 
	 > 1,0 s = 

Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W

Steuerung / Adjustment

Durch gleichzeitiges drücken der Tasten „Oben“ und „Unten“ für die Dauer von 7 Sekunden, kann die Dauer bis zur automatischen Abschaltung der Leuchte oder der Reduzierung der Helligkeit auf 30%, auf 5/15/30 Minuten eingestellt werden. /

By simultaneously pressing the „Up“ and „Down“ buttons for 7 seconds, you can set the time until the light is automatically switched off or the brightness is reduced to 30%, to 5/10/15 minutes.

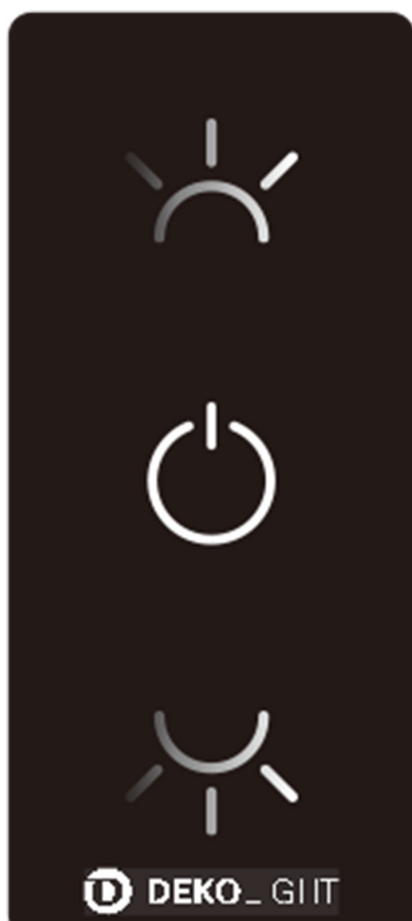

7 sec.

1. Mal / Time: 5 min.

2. Mal / Time: 15 min.

3. Mal / Time: 30 min.

Wiederholen Sie nach dem 3. Mal den Schritt erneut, um zur 1. Einstellung zurückzukehren. /
After the 3rd time, repeat the step again to return to the 1st setting.


Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W

A: Präsenzsensoren / Presence sensor

Stellen Sie bitte sicher, dass der Abstand zwischen zwei oder mehr Leuchten mind. 0,5 m beträgt, um negative Störungen oder Fehlfunktionen zu vermeiden. /


Please make sure that the distance between two or more lights is at least 0.5 m to avoid any negative interference or malfunction.

1

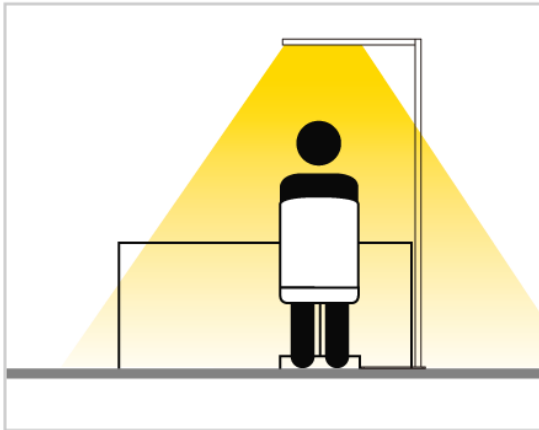


Leuchte einschalten /
turn on the lamp

2

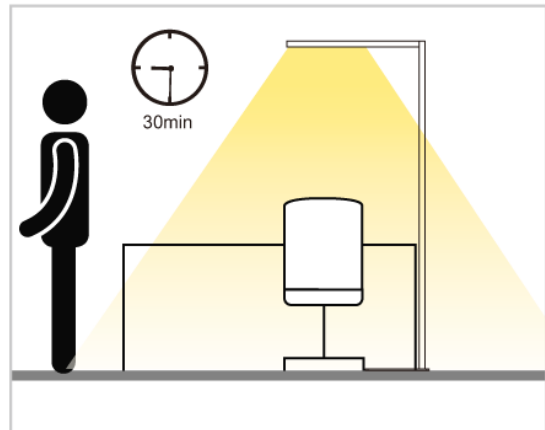

ohne Anwesenheit in 5/15/30 min. nimmt die Helligkeit auf 30% ab /
without presence in 5/15/30 min. brightness reduce to 30%


3

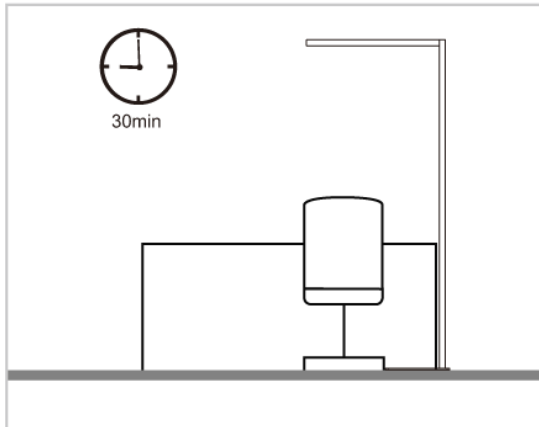

Nach weiteren 5/15/30 Minuten schaltet sich die Leuchte automatisch aus, wenn immer noch keine Anwesenheit erkannt wird. Wird innerhalb dieser 5/15/30 Minuten eine Anwesenheit erkannt, schaltet sich die Leuchte automatisch wieder ein und die Leistung kehrt auf den ursprünglich eingestellten Leistungswert zurück. /

After another 5/15/30 minutes, the lamp switches off automatically if still no presence detected. If any presence is detected within these 5/15/30 minutes, the lamp will automatically switch on again, and the power will return to the original set power value.


4

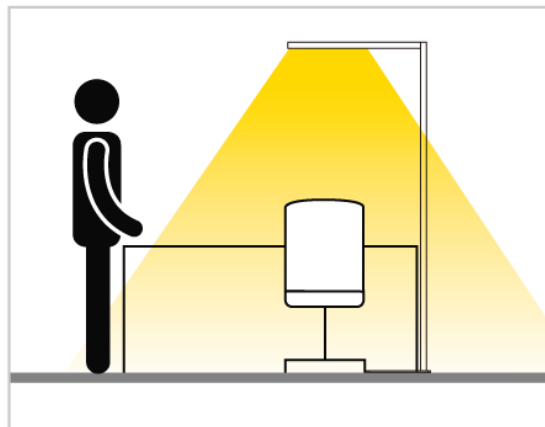

die Leuchte schaltet sich bei Anwesenheit automatisch ein /
the lamp turns on automatically when presence is detected

Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W



B: Tageslichtsensor / Daylight Sensor

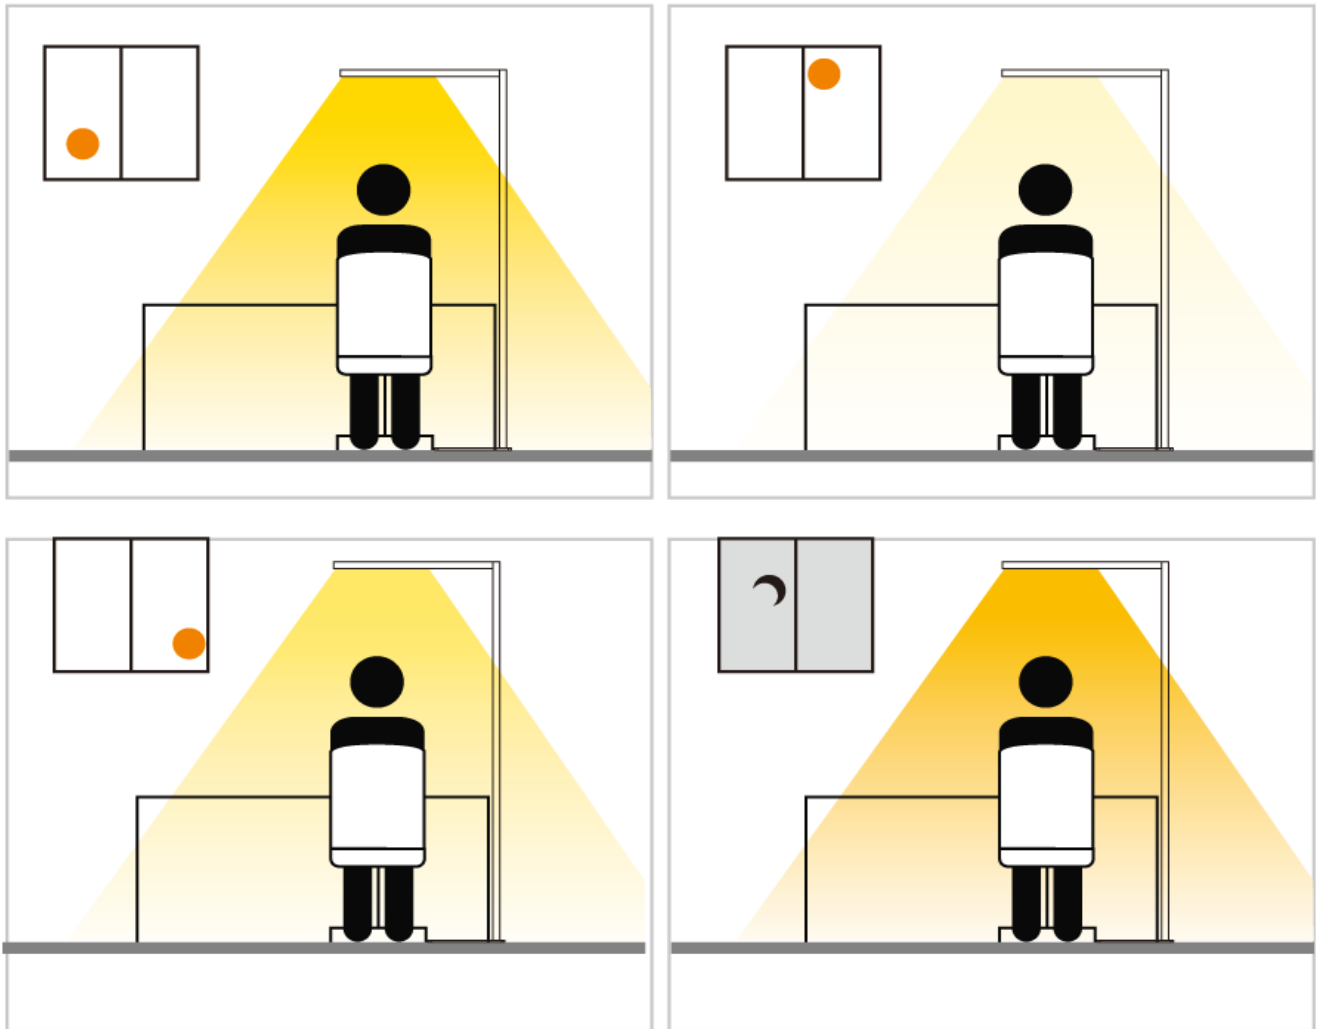

1. Licht einschalten und auf gewünschte Helligkeit dimmen. Die Einstellung wird vom Tageslichtsensor als Standard gespeichert. / Turn on the lamp and dimming to a comfortable brightness. The daylight sensor will memory the adjustment as standard.
2. Wenn das Umgebungslicht sich ändert, passt der Sensor die Helligkeit dem gespeicherten Standard an. (Toleranz 10%) / When the ambient brightness changed the sensor adjust the light to the saved standard. (tolerance 10%)
3. Die Helligkeit wird angepasst bei einer Änderung im Bereich von 20° unter dem Einstellungswert. / The brightness will be effective if there is any change within area of 20° under the setting value.
4. Jede neue Einstellung der Dimmung übernimmt der Tageslichtsensor als neuen Vorgabewert / The daylight sensor adopts each new dimming setting as the new default value.

Stehleuchte, Office Three Standard / Floor lamp Office Three Standard
200-240V AC/50-60Hz, 80,0 W

C: Schalter Einstellungen / Switch Adjustment

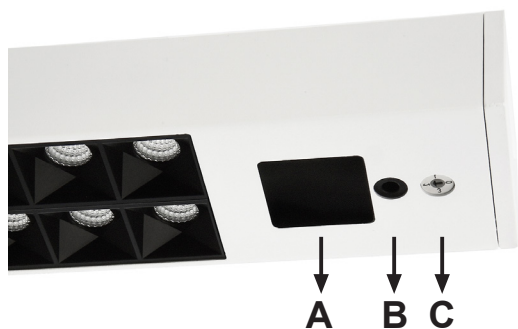

Schalter Stellung / Switch adjustment	Bewegungssensor / Presence sensor	Tageslichtsensor / Daylight sensor
0	OFF	OFF
1	ON	OFF
2	ON	ON
3	OFF	ON

Erkennungsbereich / Detectable Area

