


Art. no. 733072

Bollard light Lerna 1000, 7,4 W, 3000/4000K, Gray

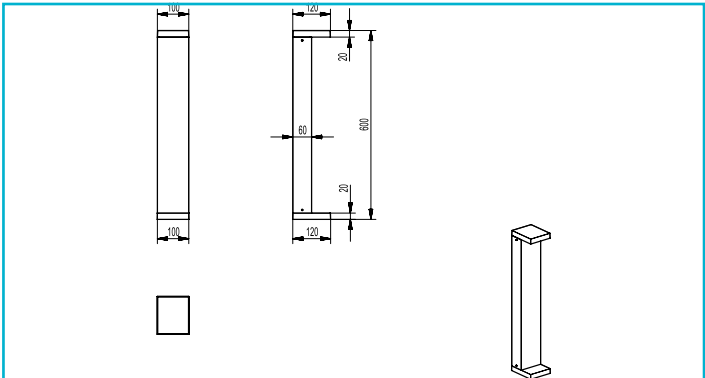

|                                         |                                             |                                     |                                                                          |
|-----------------------------------------|---------------------------------------------|-------------------------------------|--------------------------------------------------------------------------|
| Housing Material                        | Die-cast aluminium                          | Life Time L70 / B50                 | 50000 h                                                                  |
| Housing Color                           | Gray                                        | Switching Cycles                    | 50000                                                                    |
| Material of Lens                        | Glass                                       | Power Consumption                   | 8 kWh/1000h                                                              |
| Protection Class                        | Protection class I/<br>protective grounding | Energy Efficiency Class Lightsource | This product contains a<br>light source of energy<br>efficiency class D. |
| Operating Mode                          | Current constant                            |                                     |                                                                          |
| Rated Input                             | 7.4 W                                       |                                     |                                                                          |
| Rated Input Voltage min./max. Frequency | 200-240 V/AC 50 / 60 Hz                     |                                     |                                                                          |
| Power Supply Unit incl.                 | Yes                                         |                                     |                                                                          |
| Connection Type                         | Clamp                                       |                                     |                                                                          |
| Cable Gland Diameter                    | 12 mm                                       |                                     |                                                                          |
| Control                                 | No                                          |                                     |                                                                          |
| Light Source                            | LED, Light source<br>changeable TC          |                                     |                                                                          |
| Color Temperature                       | 3000/4000 K                                 |                                     |                                                                          |
| Colour Consistency                      | 3 SDCM                                      |                                     |                                                                          |
| Colour Rendering Index (Ra)             | 80                                          |                                     |                                                                          |
| Rated Luminous Flux                     | 237/256 lm                                  |                                     |                                                                          |
| Rated Luminous Flux 2                   | 256 lm                                      |                                     |                                                                          |
| Rated Angle of Reflection               | 50 Degree                                   |                                     |                                                                          |
| Rated Angle of Reflection 2             | 100 Degree                                  |                                     |                                                                          |
| Light Exit Surfaces                     | 1                                           |                                     |                                                                          |
| Light characteristics                   | Direct                                      |                                     |                                                                          |
| Light direction                         | Below                                       |                                     |                                                                          |
| Depth                                   | 120 mm                                      |                                     |                                                                          |
| Width                                   | 100 mm                                      |                                     |                                                                          |
| Height                                  | 1000 mm                                     |                                     |                                                                          |
| Working Temperature                     | -20 to 40 °C                                |                                     |                                                                          |
| Storage Temperature                     | -20 to 50 °C                                |                                     |                                                                          |
| IP Protection Class                     | IP 65                                       |                                     |                                                                          |
| IK Protection Class                     | IK06                                        |                                     |                                                                          |