



Art. no. 100144

LED panel Basic 300x1200 mm, 30,5 W, 4000 K, White

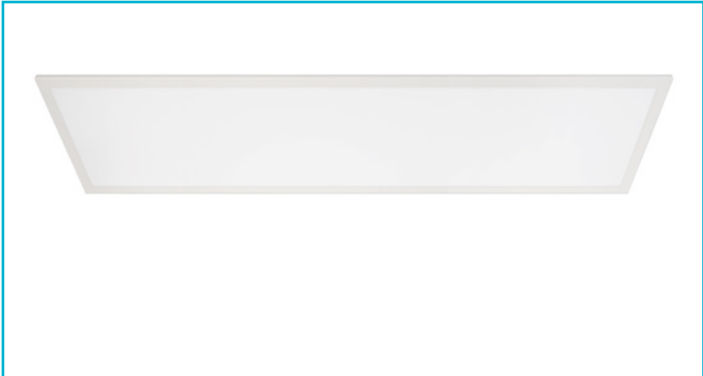

- Special features
- 230 V direct connection
 - Including power supply

Housing Material	Aluminium	IK Protection Class	IK03
Housing Color	White	Life Time L70 / B50	50000 h
Material of Lens	Plastic	Switching Cycles	100000
Protection Class Lamp	Protection class II/protective insulation	Power Consumption	31 kWh/1000h
Protection Class Power Plug	Protection class III/safety extra-low voltage	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Rated Input	30.5 W		
Rated Input Voltage min./max.	220-240 V/AC		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Control	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	4320 lm		
Luminous Efficiency	132 lm/W		
Rated Angle of Reflection	120 Degree		
UGR	22		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Depth	295 mm		
Width	1195 mm		
Height	32 mm		
Cut Out Length	270 mm		
Cut Out Width	1170 mm		
IP Protection Class	IP 40		