


Surface-mounted wall light Apodis, 800 mm, DIM, 10.8 W, 3,000 K, gold

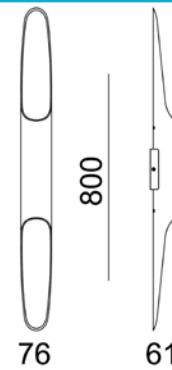

The elegant APODIS wall light captivates with its high-quality aluminium housing with compact base and a fine two-colour coating in black and gold. The Apodis emits powerful warm white light both upwards and downwards via the double light output. The light can be dimmed flexibly using leading/trailing phase angles.

Special features

- Dimmable

Housing Material	Aluminium	IP Protection Class	IP 20
Housing Color	Gold, Black		
Protection Class	Protection class I/protective grounding	Life Time L70 / B50	25000 h
Rated Input	14.7 W	Switching Cycles	100000
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Power Consumption	15 kWh/1000h
Power Supply Unit incl.	Yes	EEI	G
Connection Type	Clamp		
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	450 lm		
Rated Angle of Reflection	30 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	2		
Light characteristics	Direct		
Light direction	Below, Top		
Length	76 mm		
Width	61 mm		
Height	800 mm		
Base length	60 mm		
Base width	18 mm		
Base height	100 mm		
Working Temperature	-5 to 40 °C		
Storage Temperature	-10 to 60 °C		