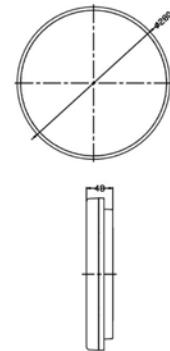


Surface-mounted ceiling light Altais, 18 W,  
3,000/4,000/6,000 K, white

It takes a lot to catch the Altais series off guard. Thanks to IP54 and impact strength class IK10, these slender outdoor lights are impressive all rounders both in a commercial and private setting. The Altais lights offer additional flexibility with their integrated movement sensor [programmable using remote control] and the adjustable light colour for different lighting scenarios.


**Special features**

- Light colour adjustable in 3 stages
- High impact resistance
- Splash water protected

<b>Housing Material</b>	Plastic	<b>Power Consumption</b>	18 kWh/1000h	
<b>Housing Color</b>	White	<b>EEI</b>	D	
<b>Halogen-free</b>	Yes			
<b>Protection Class</b>		Protection class II/protective insulation		
<b>Rated Input</b>		18 W		
<b>Rated Input Voltage Frequency</b>		220-240 V/AC 50 / 60 Hz		
<b>Power Supply Unit incl.</b>		Yes		
<b>Connection Type</b>		Clamp		
<b>Dimmable</b>		No		
<b>Motion Detector</b>		No		
<b>Light Source</b>		LED, Light source not changeable		
<b>Color Temperature</b>		3000/4000/6000 K		
<b>Colour Consistency</b>		6 SDCM		
<b>Colour Rendering Index (Ra)</b>		85		
<b>Rated Luminous Flux</b>		1870 lm		
<b>Rated Angle of Reflection</b>		120 Degree		
<b>Distribution Characteristic 120°</b>		NDLS		
<b>Light Exit Surfaces</b>		1		
<b>Light characteristics</b>		Direct		
<b>Light direction</b>		Below		
<b>Height</b>		48 mm		
<b>Diameter</b>		280 mm		
<b>Working Temperature</b>		-40 to 50 °C		
<b>Storage Temperature</b>		-10 to 60 °C		
<b>IP Protection Class</b>		IP 54		
<b>IK Protection Class</b>		IK10		
<b>Life Time L70 / B50</b>		50000 h		
<b>Switching Cycles</b>		75000		



It takes a lot to catch the Altais series off guard. Thanks to IP54 and impact strength class IK10, these slender outdoor lamps are impressive all-rounders both in commercial and private settings. Altais Motion lamps offer additional versatility with their integrated motion sensor (programmable using supplied remote control) and the adjustable light colour for different lighting scenarios.

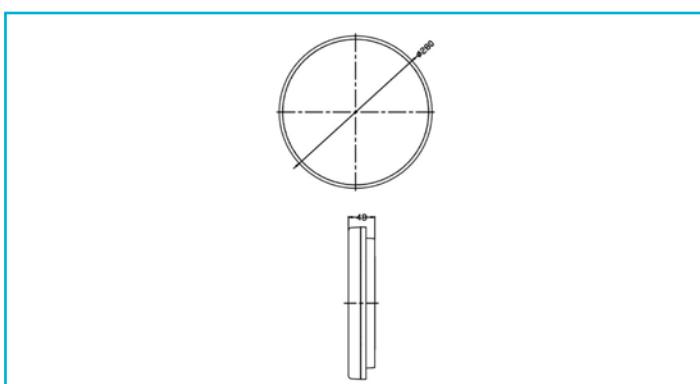

#### Special features

- Light colour adjustable in three steps
- Optional surface-mounted cable entry
- Feed-through wiring possible
- Motion detector can be adjusted by remote control (in scope of delivery)

<b>Housing Material</b>	Plastic	<b>IP Protection Class</b>	IP 54
<b>Housing Color</b>	White	<b>IK Protection Class</b>	IK10
<b>Halogen-free</b>	Yes	<b>Life Time L70 / B50</b>	50000 h
<b>Protection Class</b>	Protection class II/protective insulation	<b>Switching Cycles</b>	75000
<b>Rated Input</b>	18 W	<b>Power Consumption</b>	18 kWh/1000h
<b>Rated Power Consumption</b>	0.5 W	<b>EEI</b>	D
<b>Network Standby</b>			
<b>Rated Input Voltage</b>	220-240 V/AC 50 / 60 Hz		
<b>Frequency</b>			
<b>Power Supply Unit incl.</b>	Yes		
<b>Connection Type</b>	Clamp		
<b>Dimmable</b>	No		
<b>Motion Detector</b>	Yes		
<b>Kind of Motion Detector</b>	High frequency		
<b>Detection Distance</b>	1-12 m		
<b>Angle of Detection</b>	150 Degree		
<b>Light Source</b>	LED, Light source not changeable		
<b>Color Temperature</b>	3000/4000/6000 K		
<b>Colour Consistency</b>	6 SDCM		
<b>Colour Rendering Index (Ra)</b>	85		
<b>Rated Luminous Flux</b>	1870 lm		
<b>Rated Angle of Reflection</b>	120 Degree		
<b>Distribution Characteristic</b>	NDLS		
<b>120°</b>			
<b>Light Exit Surfaces</b>	1		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Height</b>	48 mm		
<b>Diameter</b>	280 mm		
<b>Working Temperature</b>	-40 to 50 °C		
<b>Storage Temperature</b>	-10 to 60 °C		