


Art. no. 122417

Surface-mounted ceiling light Dato, 1x max. 50 W

GU10, silver

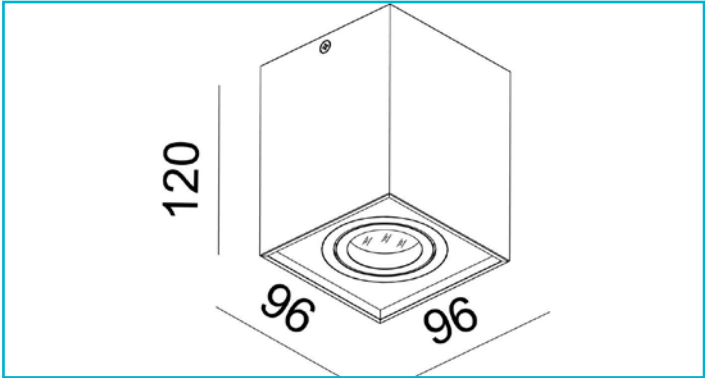


- Special features**
- Exchangeable lamp (GU10)
 - Can be rotated and swivelled
 - Max. 50 W per light

Housing Material	Aluminium
Housing Color	Silver
Housing Surface	Brushed
Protection Class	Protection class I/protective grounding
max. Power	1x max. 50 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	GU10
Socket Quantity	1
Connection Type	Clamp
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Swivel Angle	30 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	96 mm
Width	96 mm
Height	120 mm
Base length	96 mm
Base width	96 mm
Product weight	507 g
Working Temperature	-5 to 40 °C
IP Protection Class	IP 20

Art. no. 348024

Surface-mounted ceiling light Dato, 1x max. 50 W

GU10, black

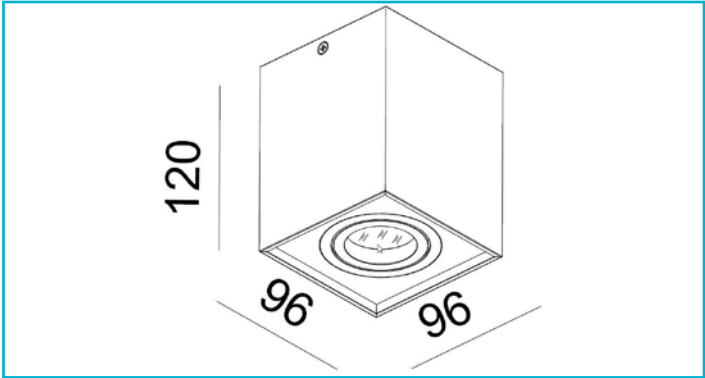


- Special features**
- Exchangeable lamp (GU10)
 - Can be rotated and swivelled
 - Max. 50 W per light

Housing Material	Aluminium
Housing Color	Black
Protection Class	Protection class I/protective grounding
max. Power	1x max. 50 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	GU10
Socket Quantity	1
Connection Type	Clamp
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Swivel Angle	30 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	96 mm
Width	96 mm
Height	120 mm
Base length	96 mm
Base width	96 mm
Product weight	507 g
Working Temperature	-5 to 40 °C
IP Protection Class	IP 20

Art. no. 348025

Surface-mounted ceiling light Dato, 1x max. 50 W

GU10, white

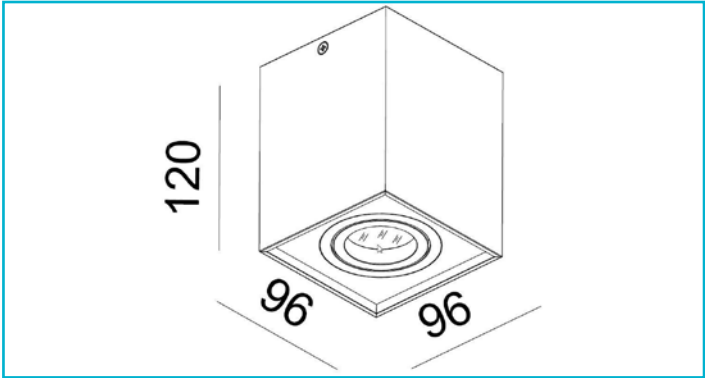

- Special features
- Exchangeable lamp (GU10)
 - Can be rotated and swivelled
 - Max. 50 W per light

Housing Material	Aluminium
Housing Color	White
Protection Class	Protection class I/protective grounding
max. Power	1x max. 50 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	GU10
Socket Quantity	1
Connection Type	Clamp
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Swivel Angle	30 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	96 mm
Width	96 mm
Height	120 mm
Base length	96 mm
Base width	96 mm
Product weight	507 g
Working Temperature	-5 to 40 °C
IP Protection Class	IP 20