


Art. no. 341215

Surface-mounted wall light Uni II Tilt, 12 W, DIM, 3,000 K, white

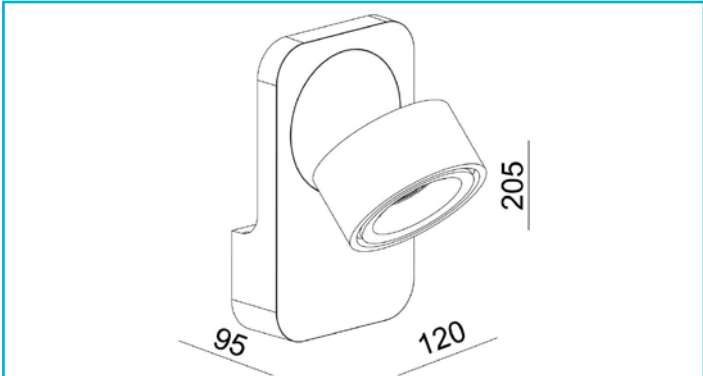

- Special features**
- Very high colour rendering
 - Can be rotated and swivelled
 - Dimmable

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Protection Class	Protection class I/protective grounding
Rated Input	12 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	670 lm
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS


Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	120 mm
Width	95 mm
Height	205 mm
Diameter	100 mm
Base length	120 mm

Base width	43 mm
Base height	205 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption EEI	12 kWh/1000h G

Art. no. 341232

Surface-mounted wall light Uni II Tilt, 12 W, DIM, 3,000 K, black

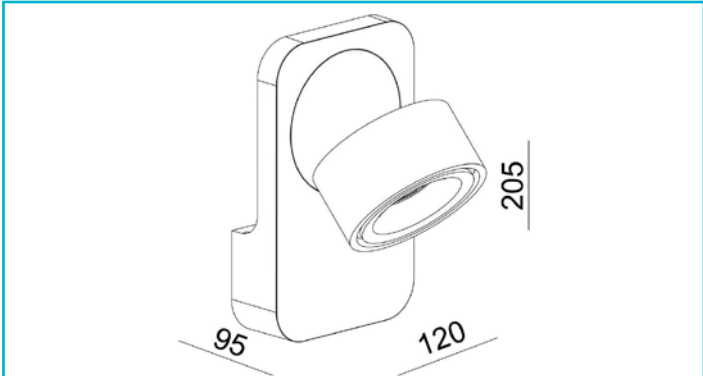

- Special features
- Very high colour rendering
 - Can be rotated and swivelled
 - Dimmable

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Plastic
Protection Class	Protection class I/protective grounding
Rated Input	12 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Base width	43 mm
Base height	205 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption EEI	12 kWh/1000h G

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	670 lm
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	120 mm
Width	95 mm
Height	205 mm
Diameter	100 mm
Base length	120 mm