


The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for easy feed-through wiring. The removable mounting plate with plug connector and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides significantly improved illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal diffuser or a transparent diffuser with smoked glass.

Special features

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination

Housing Material	Aluminium, Polycarbonate
Housing Color	Dark grey
Housing Surface	Matt
Material of Lens	Polycarbonate - PC
Colour of Lens	Smoke-coloured
Surface Structure of Lens	Transparent
Protection Class	Protection class I/protective grounding
max. Power	1x max. 20 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	E27
Illuminant Design	A60, A70, ST64
Socket Quantity	1
Connection Type	Connectionbox
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Light Exit Surfaces	5
Light characteristics	Direct
Light direction	Top, Side
Length	148 mm
Width	108 mm
Height	261.5 mm
Product weight	1378 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65

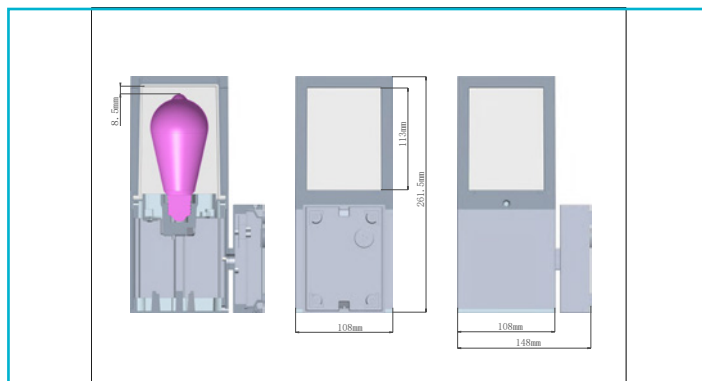

The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for easy feed-through wiring. The removable mounting plate with plug connector and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides significantly improved illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal diffuser or a transparent diffuser with smoked glass.

Special features

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination

Housing Material	Aluminium, Polycarbonate
Housing Color	Dark grey
Housing Surface	Matt
Material of Lens	Polycarbonate - PC
Colour of Lens	White
Surface Structure of Lens	Transparent
Protection Class	Protection class I/protective grounding
max. Power	1x max. 20 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	E27
Illuminant Design	A60, A70, ST64
Socket Quantity	1
Connection Type	Connectionbox
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Light Exit Surfaces	5
Light characteristics	Direct
Light direction	Top, Side
Length	148 mm
Width	108 mm
Height	261.5 mm
Product weight	1378 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65