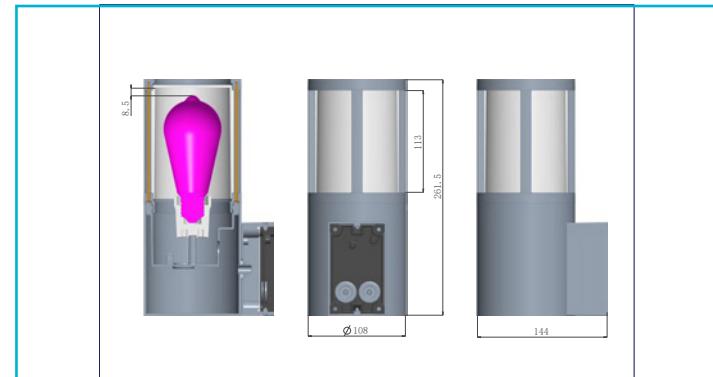


**Surface-mounted wall light Facado II round tinted, 1x  
max. 20 W, grey**


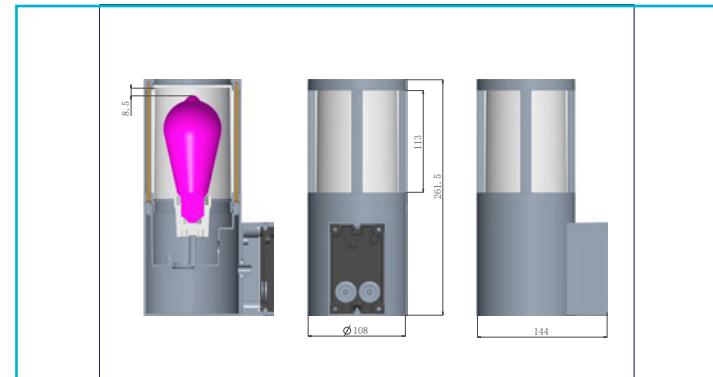
The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for problem-free feed-through wiring. The removable mounting plate with plug connection and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides even better illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal or transparent diffuser with smoked glass effect.

**Special features**

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- rapid and secure installation
- Weather protection with IP65
- Newly designed lamp head for improved illumination

<b>Housing Material</b>	Aluminium, Polycarbonate
<b>Housing Color</b>	Dark grey
<b>Housing Surface</b>	Matt
<b>Material of Lens</b>	Polycarbonate - PC
<b>Colour of Lens</b>	Smoke-coloured
<b>Surface Structure of Lens</b>	Transparent
<b>Protection Class</b>	Protection class I/protective grounding
<b>max. Power</b>	1x max. 20 W
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz
<b>Socket Description</b>	E27
<b>Illuminant Design</b>	A60, A70, ST64
<b>Socket Quantity</b>	1
<b>Connection Type</b>	Connectionbox
<b>Dimmable</b>	Yes
<b>Control</b>	Dimmable via optional light source
<b>Motion Detector</b>	No
<b>Execution</b>	Without lamp
<b>Light Exit Surfaces</b>	5
<b>Light characteristics</b>	Direct
<b>Light direction</b>	Top, Side
<b>Length</b>	144 mm
<b>Height</b>	261.5 mm
<b>Diameter</b>	108 mm
<b>Product weight</b>	1378 g
<b>Working Temperature</b>	-20 to 40 °C
<b>Storage Temperature</b>	-10 to 60 °C
<b>IP Protection Class</b>	IP 65

**Surface-mounted wall light Facado II round opal, 1x  
max. 20 W, grey**


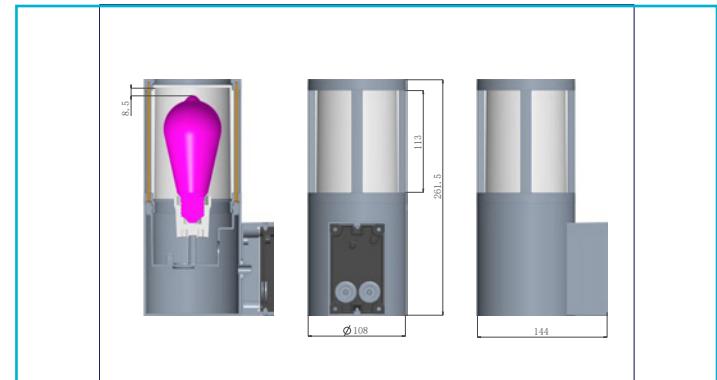
The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for problem-free feed-through wiring. The removable mounting plate with plug connection and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides even better illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal or transparent diffuser with smoked glass effect.

**Special features**

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- rapid and secure installation
- Weather protection with IP65
- Newly designed lamp head for improved illumination

<b>Housing Material</b>	Aluminium, Polycarbonate
<b>Housing Color</b>	Dark grey
<b>Housing Surface</b>	Matt
<b>Material of Lens</b>	Polycarbonate - PC
<b>Colour of Lens</b>	White
<b>Surface Structure of Lens</b>	Transparent
<b>Protection Class</b>	Protection class I/protective grounding
<b>max. Power</b>	1x max. 20 W
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz
<b>Socket Description</b>	E27
<b>Illuminant Design</b>	A60, A70, ST64
<b>Socket Quantity</b>	1
<b>Connection Type</b>	Connectionbox
<b>Dimmable</b>	Yes
<b>Control</b>	Dimmable via optional light source
<b>Motion Detector</b>	No
<b>Execution</b>	Without lamp
<b>Light Exit Surfaces</b>	5
<b>Light characteristics</b>	Direct
<b>Light direction</b>	Top, Side
<b>Length</b>	144 mm
<b>Height</b>	261.5 mm
<b>Diameter</b>	108 mm
<b>Product weight</b>	1378 g
<b>Working Temperature</b>	-20 to 40 °C
<b>Storage Temperature</b>	-10 to 60 °C
<b>IP Protection Class</b>	IP 65

**Surface-mounted wall light Facado II round tinted, 1x  
max. 20 W, rust**


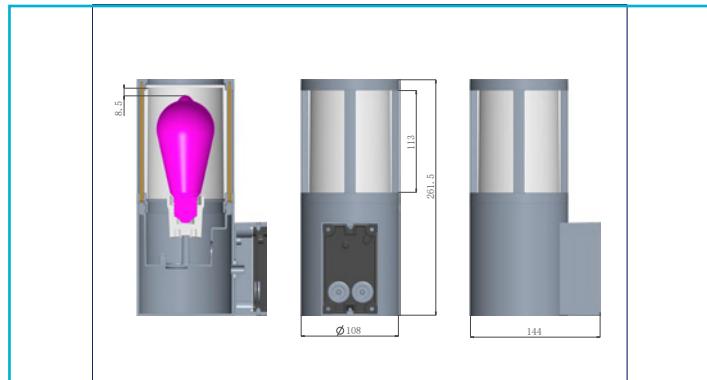
The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for problem-free feed-through wiring. The removable mounting plate with plug connection and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides even better illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal or transparent diffuser with smoked glass effect.

**Special features**

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- rapid and secure installation
- Weather protection with IP65
- Newly designed lamp head for improved illumination

<b>Housing Material</b>	Aluminium, Polycarbonate
<b>Housing Color</b>	Rust
<b>Housing Surface</b>	Matt
<b>Material of Lens</b>	Polycarbonate - PC
<b>Colour of Lens</b>	Smoke-coloured
<b>Surface Structure of Lens</b>	Transparent
<b>Protection Class</b>	Protection class I/protective grounding
<b>max. Power</b>	1x max. 20 W
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz
<b>Socket Description</b>	E27
<b>Illuminant Design</b>	A60, A70, ST64
<b>Socket Quantity</b>	1
<b>Connection Type</b>	Connectionbox
<b>Dimmable</b>	Yes
<b>Control</b>	Dimmable via optional light source
<b>Motion Detector</b>	No
<b>Execution</b>	Without lamp
<b>Light Exit Surfaces</b>	5
<b>Light characteristics</b>	Direct
<b>Light direction</b>	Top, Side
<b>Length</b>	144 mm
<b>Height</b>	261.5 mm
<b>Diameter</b>	108 mm
<b>Product weight</b>	1378 g
<b>Working Temperature</b>	-20 to 40 °C
<b>Storage Temperature</b>	-10 to 60 °C
<b>IP Protection Class</b>	IP 65

**Surface-mounted wall light Facado II round opal, 1x  
max. 20 W, rust**


The FACADO wall light is our flexible solution for outdoor lighting. Two cable entry points allow for problem-free feed-through wiring. The removable mounting plate with plug connection and the screwless connecting terminals allow for quick and easy installation. The newly designed lamp head provides even better illumination. IP65 degree of protection ensures impressive weather resistance.

The FACADO outdoor light is available in square and round designs in either dark grey or rust. You can also choose between an opal or transparent diffuser with smoked glass effect.

**Special features**

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- rapid and secure installation
- Weather protection with IP65
- Newly designed lamp head for improved illumination

<b>Housing Material</b>	Aluminium, Polycarbonate
<b>Housing Color</b>	Rust
<b>Housing Surface</b>	Matt
<b>Material of Lens</b>	Polycarbonate - PC
<b>Colour of Lens</b>	White
<b>Surface Structure of Lens</b>	Transparent
<b>Protection Class</b>	Protection class I/protective grounding
<b>max. Power</b>	1x max. 20 W
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz
<b>Socket Description</b>	E27
<b>Illuminant Design</b>	A60, A70, ST64
<b>Socket Quantity</b>	1
<b>Connection Type</b>	Connectionbox
<b>Dimmable</b>	Yes
<b>Control</b>	Dimmable via optional light source
<b>Motion Detector</b>	No
<b>Execution</b>	Without lamp
<b>Light Exit Surfaces</b>	5
<b>Light characteristics</b>	Direct
<b>Light direction</b>	Top, Side
<b>Length</b>	144 mm
<b>Height</b>	261.5 mm
<b>Diameter</b>	108 mm
<b>Product weight</b>	1378 g
<b>Working Temperature</b>	-20 to 40 °C
<b>Storage Temperature</b>	-10 to 60 °C
<b>IP Protection Class</b>	IP 65