


Art. no. 731033

Surface-mounted wall light Uria 10 Up and Down, 11.2 W, 3,000 K, grey

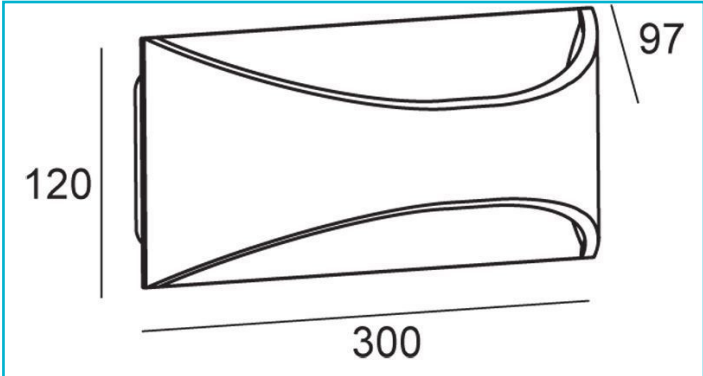

- Special features
- Base L x W x H: 270 x 20 x 85 mm

Housing Material	Aluminium
Housing Color	Grey
Colour of Lens	White
Protection Class	Protection class I/protective grounding
Rated Input	11.2 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	No
Motion Detector	No

Life Time L70 / B50	30000 h
Switching Cycles	8000
Power Consumption	12 kWh/1000h
EEI	G

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	408 lm
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	300 mm
Width	97 mm
Height	120 mm
Base length	270 mm
Base width	20 mm
Base height	85 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65