


Art. no. 343032

**Standing lamp Office One Motion Up and Down, 80 W,
Touch DIM, 4,000 K, silver**

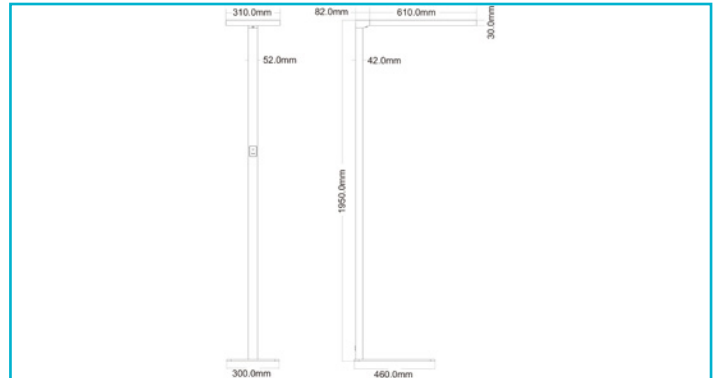

Special features

- Very low glare value
- Service life 50,000 h L80B10
- Dimmable using touch sensor
- Motion sensor
- Ready to use

Housing Material	Aluminium
Housing Color	Silver
Material of Lens	Acryl
Colour of Lens	White
Protection Class	Protection class I/protective grounding
Rated Input	80 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage	220-240 V/AC 50 / 60 Hz
Frequency	
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug
Primary Cable Length	1.5 m
Connection Type According to Standard	Typ X
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	Yes
Kind of Motion Detector	Infrared
Detection Distance	0-3.5 m
Angle of Detection	85 Degree


Light Source	LED, Light source not changeable
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	7400 lm
Luminous Efficiency	92.5 lm/W
Rated Angle of Reflection	110 Degree
Rated Angle of Reflection 2	90 Degree
UGR	19

Distribution Characteristic 120°	DLS
Light Exit Surfaces	2
Light characteristics	Direct
Light direction	Top, Below
Length	610 mm
Width	310 mm
Height	1950 mm
Base length	460 mm
Base width	300 mm
Base height	8 mm
Product weight	14480 g

Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Life Time L80 / B10	50000 h
Switching Cycles	25000
Power Consumption EEI	80 kWh/1000h F

Art. no. 343035

**Standing lamp Office One Motion Up and Down, 80 W,
Touch DIM, 3,000 K, silver**

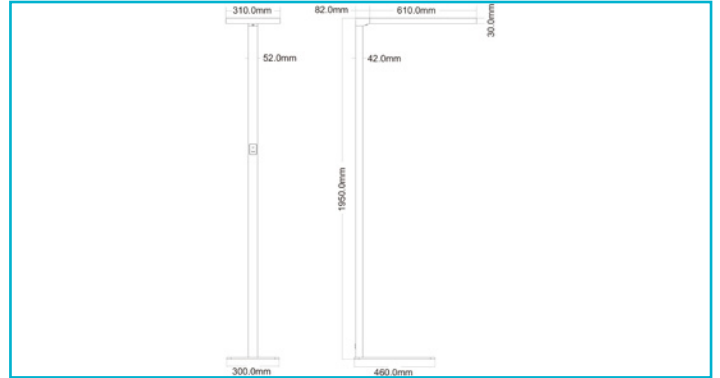

Special features

- Very low glare value
- Service life 50,000 h L80B10
- Dimmable using touch sensor
- Motion sensor
- Ready to use

Housing Material	Aluminium
Housing Color	Silver
Material of Lens	Acryl
Colour of Lens	White
Protection Class	Protection class I/protective grounding
Rated Input	80 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage	220-240 V/AC 50 / 60 Hz
Frequency	
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug
Primary Cable Length	1.5 m
Connection Type According to Standard	Typ X
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	Yes
Kind of Motion Detector	Infrared
Detection Distance	0-3.5 m
Angle of Detection	85 Degree

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	6700 lm
Luminous Efficiency	83.8 lm/W
Rated Angle of Reflection	110 Degree
Rated Angle of Reflection 2	90 Degree
UGR	19

Distribution Characteristic 120°	DLS
Light Exit Surfaces	2
Light characteristics	Direct
Light direction	Top, Below
Length	610 mm
Width	310 mm
Height	1950 mm
Base length	460 mm
Base width	300 mm
Base height	8 mm
Product weight	14300 g

Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Life Time L80 / B10	50000 h
Switching Cycles	25000
Power Consumption EEI	80 kWh/1000h F