


Art. no. 707139

## Three-phase light Flood SMD, 30 W, 3,000 K, white

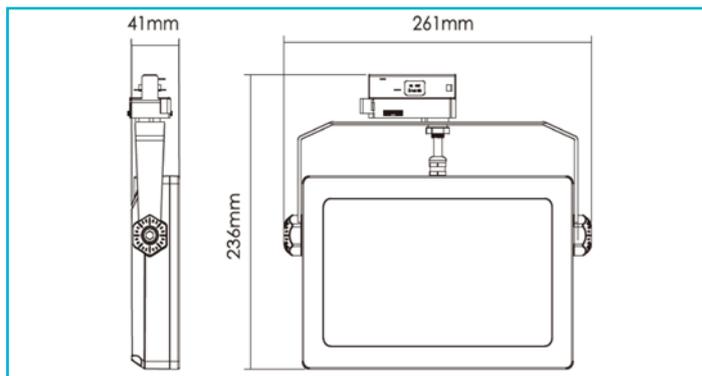

### Special features

- Can be rotated and swivelled
- Large tilt angle

<b>Housing Material</b>	Aluminium
<b>Housing Color</b>	White
<b>Material of Lens</b>	Glass
<b>Protection Class</b>	Protection class I/protective grounding
<b>Rated Input</b>	30 W
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz
<b>Power Supply Unit incl.</b>	Yes
<b>Connection Type</b>	Adapter
<b>Dimmable</b>	No
<b>Motion Detector</b>	No

<b>Light Source</b>	LED, Light source not changeable
<b>Lightcolor</b>	Warm white (WW)
<b>Color Temperature</b>	3000 K
<b>Colour Consistency</b>	5 SDCM
<b>Colour Rendering Index (Ra)</b>	80
<b>Rated Luminous Flux</b>	3150 lm
<b>Luminous Efficiency</b>	105 lm/W
<b>Rated Angle of Reflection</b>	90 Degree
<b>UGR</b>	28
<b>Light Distribution</b>	Symmetric
<b>Distribution Characteristic 120°</b>	DLS


<b>Swivel Angle</b>	180 Degree
<b>Light Exit Surfaces</b>	1
<b>Light characteristics</b>	Direct
<b>Light direction</b>	Below

<b>Length</b>	261 mm
<b>Width</b>	236 mm
<b>Height</b>	41 mm
<b>Product weight</b>	1550 g

<b>Working Temperature</b>	-20 to 40 °C
<b>Storage Temperature</b>	-10 to 40 °C
<b>IP Protection Class</b>	IP 20
<b>IK Protection Class</b>	IK07
<b>Life Time L70 / B50</b>	30000 h
<b>Switching Cycles</b>	15000
<b>Power Consumption EEI</b>	30 kWh/1000h F

Art. no. 707140

Three-phase light Flood SMD, 30 W, 4,000 K, white

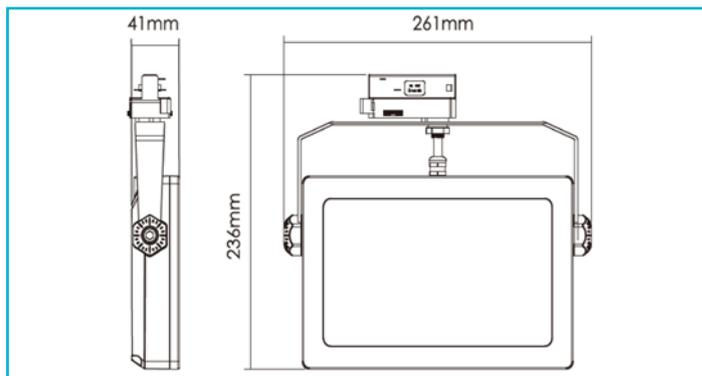

Special features

- Can be rotated and swivelled
- Large tilt angle

<b>Housing Material</b>	Aluminium	<b>Storage Temperature</b>	-10 to 40 °C
<b>Housing Color</b>	White	<b>IP Protection Class</b>	IP 20
<b>Material of Lens</b>	Glass	<b>IK Protection Class</b>	IK07
<b>Protection Class</b>	Protection class I/protective grounding	<b>Life Time L70 / B50</b>	30000 h
<b>Rated Input</b>	30 W	<b>Switching Cycles</b>	15000
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz	<b>Power Consumption</b>	30 kWh/1000h
<b>Power Supply Unit incl.</b>	Yes	<b>EEL</b>	F
<b>Connection Type</b>	Adapter		
<b>Dimmable</b>	No		
<b>Motion Detector</b>	No		
<b>Light Source</b>	LED, Light source not changeable		
<b>Lightcolor</b>	Neutral white		
<b>Color Temperature</b>	4000 K		
<b>Colour Consistency</b>	5 SDCM		
<b>Colour Rendering Index (Ra)</b>	80		
<b>Rated Luminous Flux</b>	3300 lm		
<b>Luminous Efficiency</b>	110 lm/W		
<b>Rated Angle of Reflection</b>	90 Degree		
<b>UGR</b>	28		
<b>Distribution Characteristic 120°</b>	DLS		
<b>Swivel Angle</b>	180 Degree		
<b>Light Exit Surfaces</b>	1		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Length</b>	261 mm		
<b>Width</b>	236 mm		
<b>Height</b>	41 mm		
<b>Product weight</b>	1550 g		
<b>Working Temperature</b>	-20 to 40 °C		