


Art. no. 707110


Three-phase spotlight Alnitak 25, 32 W, 3,000 K, white

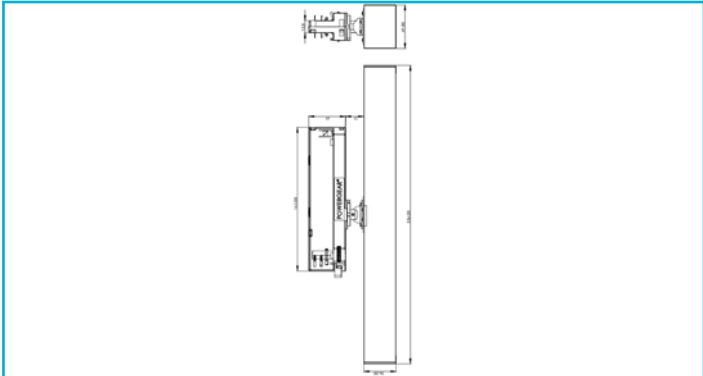


- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium
Housing Color	White
Material of Lens	Polycarbonate - PC
Protection Class	Protection class II/protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3010 lm
Luminous Efficiency	91.6 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric
Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	98 mm
Width	49 mm
Height	336 mm
Product weight	583 g
Working Temperature	-25 to 45 °C

Storage Temperature	-25 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
EEI	E




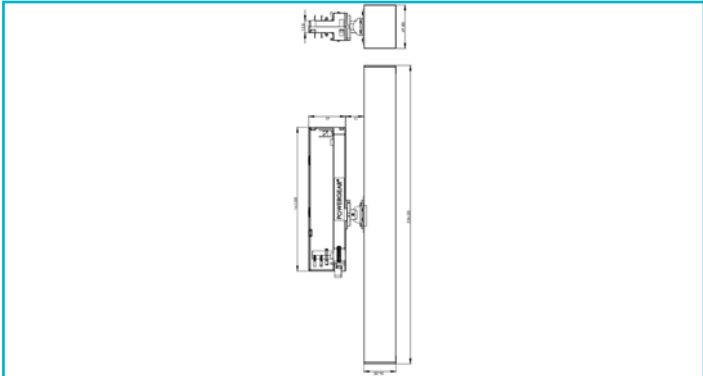


- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium
Housing Color	White
Material of Lens	Polycarbonate - PC
Protection Class	Protection class II/protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3150 lm
Luminous Efficiency	90.2 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric
Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	98 mm
Width	49 mm
Height	336 mm
Product weight	584 g
Working Temperature	-25 to 45 °C

Storage Temperature	-25 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
EEI	E




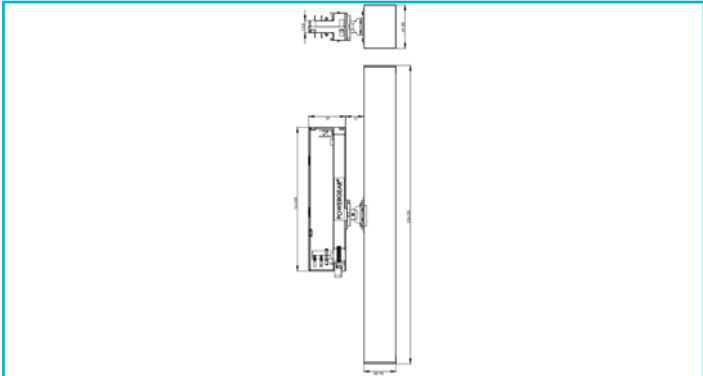


- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium
Housing Color	Grey
Material of Lens	Polycarbonate - PC
Protection Class	Protection class II/protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3020 lm
Luminous Efficiency	91.6 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric
Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	98 mm
Width	49 mm
Height	336 mm
Product weight	582 g
Working Temperature	-25 to 45 °C

Storage Temperature	-25 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
EEI	E




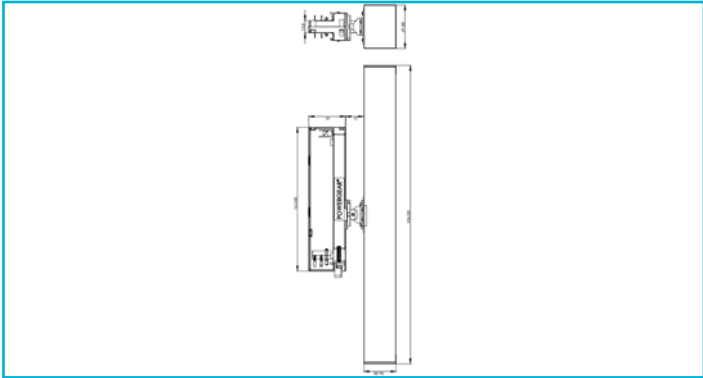


- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium
Housing Color	Grey
Material of Lens	Polycarbonate - PC
Protection Class	Protection class II/protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3050 lm
Luminous Efficiency	90.2 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric
Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	98 mm
Width	49 mm
Height	336 mm
Product weight	582 g
Working Temperature	-25 to 45 °C


Storage Temperature	-25 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
EEI	E




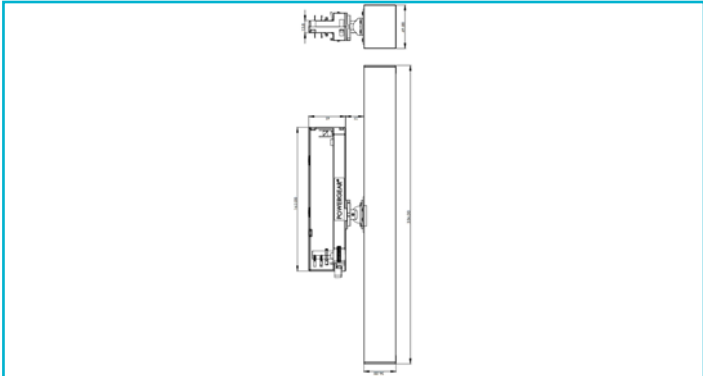

- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium	Storage Temperature	-25 to 50 °C
Housing Color	Black	IP Protection Class	IP 20
Material of Lens	Polycarbonate - PC	Life Time L70 / B50	30000 h
Protection Class	Protection class II/protective insulation	Life Time L80 / B10	50000 h
Power Selectable	23 W, 28 W, 30 W, 32 W	Switching Cycles	15000
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Power Consumption	32 kWh/1000h
Power Supply Unit incl.	Yes	Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.
Connection Type	Adapter		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	3030 lm		
Luminous Efficiency	91.6 lm/W		
Rated Angle of Reflection	36 Degree		
UGR	16		
Light Distribution	Symmetric		
Swivel Angle	25 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Length	98 mm		
Width	49 mm		
Height	336 mm		
Product weight	573 g		
Working Temperature	-25 to 45 °C		



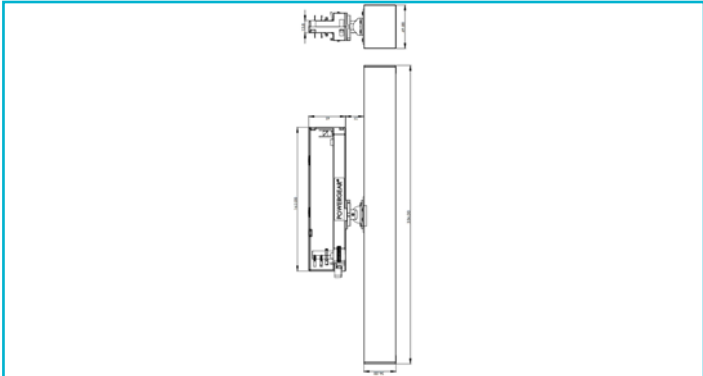

- Special features
- Output adjustable in four steps
 - Can be rotated and swivelled
 - Low glare value
 - For D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Polycarbonate - PC
Protection Class	Protection class II/protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	No
Motion Detector	No
Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3130 lm
Luminous Efficiency	90.2 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric
Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	98 mm
Width	49 mm
Height	336 mm
Product weight	582 g
Working Temperature	-25 to 45 °C

Storage Temperature	-25 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
EEI	E

