


Art. no. 707044

Three-phase spotlight Uni II Tilt, 17 W, DIM, 3,000 K, white

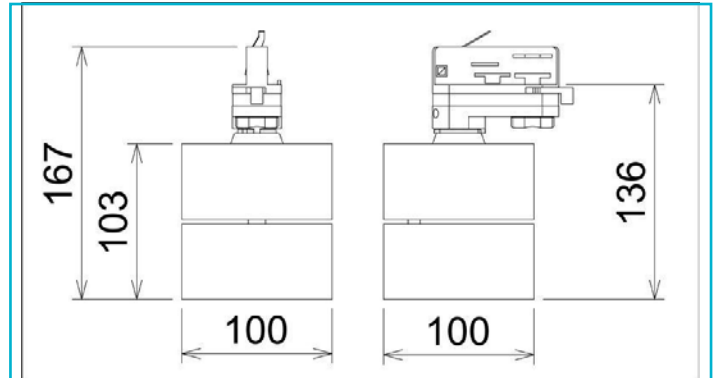

Special features

- Very high colour rendering
- can be rotated and swivelled
- dimmable

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Protection Class	Protection class I/protective grounding
Rated Input	17 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	910 lm
Luminous Efficiency	53.5 lm/W
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS


Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	167 mm
Diameter	100 mm
Product weight	852 g

Working Temperature	-5 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption	17 kWh/1000h
EEI	G

Art. no. 707131

Three-phase spotlight Uni II Tilt, 17 W, DIM, 3,000 K, black

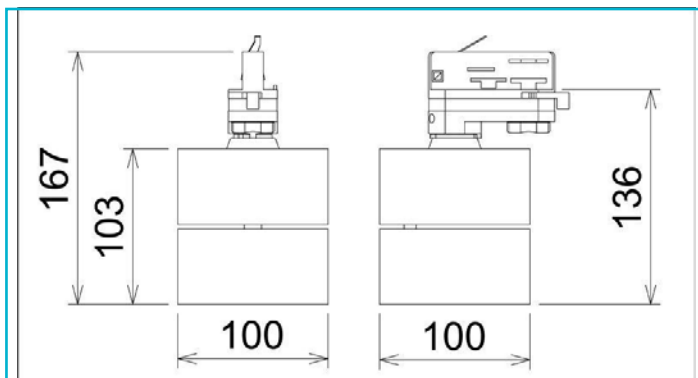

Special features

- Very high colour rendering
- can be rotated and swivelled
- dimmable

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Plastic
Protection Class	Protection class I/protective grounding
Rated Input	17 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Adapter
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	910 lm
Luminous Efficiency	53.5 lm/W
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	167 mm
Diameter	100 mm
Product weight	852 g

Working Temperature	-5 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption	17 kWh/1000h
EEI	G