


The SOTANO series - a classic cellar light in a modern design with LED technology. This incredibly versatile and robust light is the perfect solution for a wide range of applications. The cellar light is extremely flexible thanks to a 3,000/4,000 K CCT switch and 4.5/7.5 W power switch that allow the light colour and output to be adjusted according to the application and requirements. The cable entries on multiple sides enable flexible and simple installation. The light is also robust and durable thanks to its IP54 protected housing, impact resistance according to IK08 and impressive service life of 72,000 hours according to L80B10.

Special features

- Classic cellar light with modern LED technology
- Colour temperature adjustable (3,000/4,000 K) via slide switch
- Output adjustable in two stages (4.5/7.5 W) via slide switch
- Six cable entry points on multiple sides
- Flexible installation

Housing Material	Polycarbonate	Power Consumption	8 kWh/1000h
Housing Color	White	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Material of Lens	Polycarbonate - PC		
Colour of Lens	White		
Surface Structure of Lens	Opal		
Protection Class	Protection class II/protective insulation		
Power Selectable	4.5 W, 7.5 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	6 PCS		
Cable Gland Diameter	15 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Rated Luminous Flux	450/750 lm		
Rated Angle of Reflection	120 Degree		
Length	165 mm		
Width	120 mm		
Height	65 mm		
Working Temperature	-30 to 40 °C		
Storage Temperature	-30 to 60 °C		
IP Protection Class	IP 54		
IK Protection Class	IK08		
Life Time L70 / B50	72000 h		
Life Time L80 / B10	72000 h		
Switching Cycles	35000		

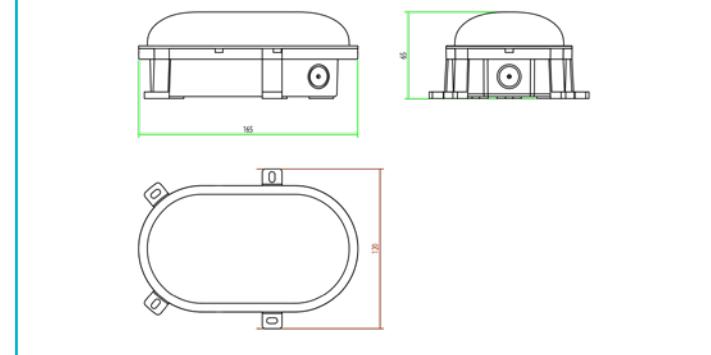


The SOTANO series - a classic cellar light in a modern design with LED technology. This incredibly versatile and robust light is the perfect solution for a wide range of applications. The cellar light is extremely flexible thanks to a 3,000/4,000 K CCT switch and 4.5/7.5 W power switch that allow the light colour and output to be adjusted according to the application and requirements. The cable entries on multiple sides enable flexible and simple installation. The light is also robust and durable thanks to its IP54 protected housing, impact resistance according to IK08 and impressive service life of 72,000 hours according to L80B10.

Special features

- Classic cellar light with modern LED technology
- Colour temperature adjustable (3,000/4,000 K) via slide switch
- Output adjustable in two stages (4.5/7.5 W) via slide switch
- Six cable entry points on multiple sides
- Flexible installation

Housing Material	Polycarbonate	Power Consumption	8 kWh/1000h
Housing Color	Grey	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Material of Lens	Polycarbonate - PC		
Colour of Lens	White		
Surface Structure of Lens	Opal		
Protection Class	Protection class II/protective insulation		
Power Selectable	4.5 W, 7.5 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	6 PCS		
Cable Gland Diameter	15 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Rated Luminous Flux	450/750 lm		
Rated Angle of Reflection	120 Degree		
Length	165 mm		
Width	120 mm		
Height	65 mm		
Working Temperature	-30 to 40 °C		
Storage Temperature	-30 to 60 °C		
IP Protection Class	IP 54		
IK Protection Class	IK08		
Life Time L70 / B50	72000 h		
Life Time L80 / B10	72000 h		
Switching Cycles	35000		

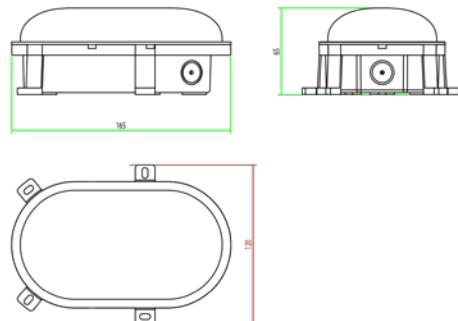

The SOTANO series - a classic cellar light in a modern design with LED technology. This incredibly versatile and robust light is the perfect solution for a wide range of applications. The cellar light is extremely flexible thanks to a 3,000/4,000 K CCT switch and 4.5/7.5 W power switch that allow the light colour and output to be adjusted according to the application and requirements. The cable entries on multiple sides enable flexible and simple installation. The light is also robust and durable thanks to its IP54 protected housing, impact resistance according to IK08 and impressive service life of 72,000 hours according to L80B10.

Special features

- Classic cellar light with modern LED technology
- Colour temperature adjustable (3,000/4,000 K) via slide switch
- Output adjustable in two stages (4.5/7.5 W) via slide switch
- Six cable entry points on multiple sides
- Flexible installation

Housing Material	Polycarbonate	Power Consumption	8 kWh/1000h
Housing Color	Black	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Material of Lens	Polycarbonate - PC		
Colour of Lens	White		
Surface Structure of Lens	Opal		
Protection Class	Protection class II/protective insulation		
Power Selectable	4.5 W, 7.5 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	6 PCS		
Cable Gland Diameter	15 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Rated Luminous Flux	450/750 lm		
Rated Angle of Reflection	120 Degree		
Length	165 mm		
Width	120 mm		
Height	65 mm		
Working Temperature	-30 to 40 °C		
Storage Temperature	-30 to 60 °C		
IP Protection Class	IP 54		
IK Protection Class	IK08		
Life Time L70 / B50	72000 h		
Life Time L80 / B10	72000 h		
Switching Cycles	35000		