


Product datasheet

Pendant lamp, Apollon, matt black, 220-240V AC/50-60Hz, 42,00 W, warmwhite

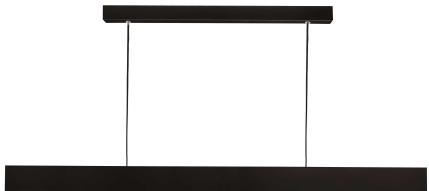

Technical Data

General Characteristics

Material	aluminum
Colour	matt black
Optics	matt
included in delivery	

Electrical Characteristics

Power / power consumption	42,00 W / 42,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	leading edge or trailing edge
Connection possibility	AMP plug
Protection class I, II, III	I


Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	2700 K
Luminous flux	2475 lm
Beam angle	110°
LED type	
LED quantity	
Spectral power distribution	



Product datasheet

Pendant lamp, Apollon, matt black, 220-240V AC/50-60Hz, 42,00 W, warmwhite

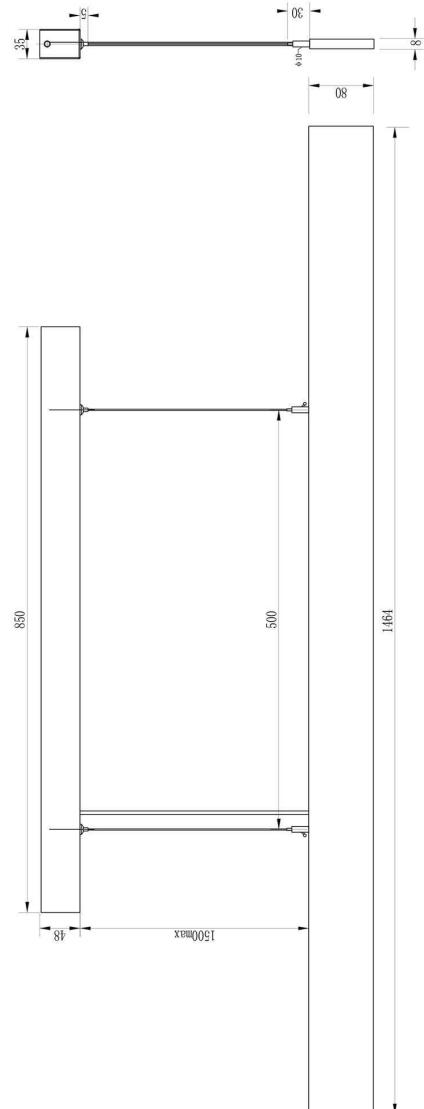

Light Direction

Rotating and tilting range	
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

Dimensions & Weight

Length	1464,00
Width	80,00
Height	8,00
Diameter	0,00
Suspensions from ceiling	3000,00
Product Weight	

Base dimensions

Length	850,00
Width	35,00
Height	48,00
Diameter	0,00

Product datasheet

Pendant lamp, Apollon, matt black, 220-240V AC/50-60Hz, 42,00 W, warmwhite

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-30°C - +60°C
IP - Code	IP20

General product data

Environmental Characteristics

Energy label	
Energy consumption	42 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,80
Number of switching cycles	25000

IP20

Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I

in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person