


#### Special features

- Can be rotated and swivelled
- Large tilt angle
- High luminous flux
- Housing made from die-cast aluminium

<b>Housing Material</b>	Aluminium	<b>IP Protection Class</b>	IP 20
<b>Housing Color</b>	White	<b>IK Protection Class</b>	IK07
<b>Material of Lens</b>	Glass	<b>Life Time L70 / B50</b>	30000 h
<b>Protection Class</b>	Protection class I/protective grounding	<b>Switching Cycles</b>	15000
<b>Rated Input</b>	15 W	<b>Power Consumption</b>	15 kWh/1000h
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz	<b>EEI</b>	E
<b>Power Supply Unit incl.</b>	Yes		
<b>Connection Type</b>	Adapter		
<b>Dimmable</b>	No		
<b>Motion Detector</b>	No		
<b>Light Source</b>	LED, Light source not changeable		
<b>Lightcolor</b>	Warm white (WW)		
<b>Color Temperature</b>	3000 K		
<b>Colour Consistency</b>	5 SDCM		
<b>Colour Rendering Index (Ra)</b>	80		
<b>Rated Luminous Flux</b>	1575 lm		
<b>Luminous Efficiency</b>	105 lm/W		
<b>Rated Angle of Reflection</b>	90 Degree		
<b>Distribution Characteristic 120°</b>	DLS		
<b>Swivel Angle</b>	180 Degree		
<b>Light Exit Surfaces</b>	1		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Length</b>	192 mm		
<b>Width</b>	180 mm		
<b>Height</b>	38 mm		
<b>Product weight</b>	760 g		
<b>Working Temperature</b>	-20 to 40 °C		
<b>Storage Temperature</b>	-10 to 40 °C		

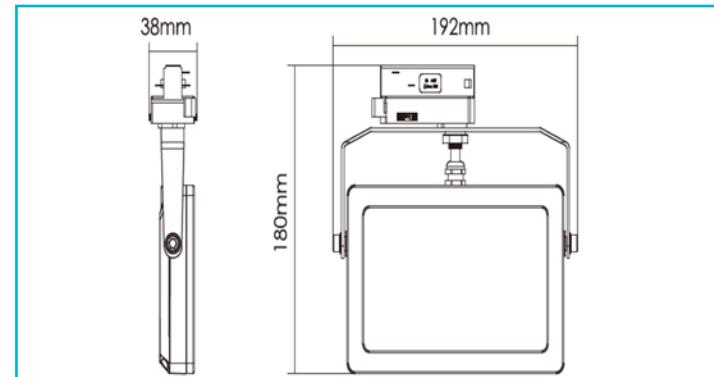

#### Special features

- Can be rotated and swivelled
- Large tilt angle
- High luminous flux
- Housing made from die-cast aluminium

<b>Housing Material</b>	Aluminium	<b>IP Protection Class</b>	IP 20
<b>Housing Color</b>	White	<b>IK Protection Class</b>	IK07
<b>Material of Lens</b>	Glass	<b>Life Time L70 / B50</b>	30000 h
<b>Protection Class</b>	Protection class I/protective grounding	<b>Switching Cycles</b>	15000
<b>Rated Input</b>	15 W	<b>Power Consumption</b>	15 kWh/1000h
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz	<b>EEI</b>	E
<b>Power Supply Unit incl.</b>	Yes		
<b>Connection Type</b>	Adapter		
<b>Dimmable</b>	No		
<b>Motion Detector</b>	No		
<b>Light Source</b>	LED, Light source not changeable		
<b>Lightcolor</b>	Neutral white		
<b>Color Temperature</b>	4000 K		
<b>Colour Consistency</b>	5 SDCM		
<b>Colour Rendering Index (Ra)</b>	80		
<b>Rated Luminous Flux</b>	1650 lm		
<b>Luminous Efficiency</b>	110 lm/W		
<b>Rated Angle of Reflection</b>	90 Degree		
<b>Distribution Characteristic 120°</b>	DLS		
<b>Swivel Angle</b>	180 Degree		
<b>Light Exit Surfaces</b>	1		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Length</b>	192 mm		
<b>Width</b>	180 mm		
<b>Height</b>	38 mm		
<b>Product weight</b>	760 g		
<b>Working Temperature</b>	-20 to 40 °C		
<b>Storage Temperature</b>	-10 to 40 °C		